

PR



3186

2-wire transmitter isolator

Model no. 3186

No. 3186V100-UK



ATEX



SIGNALS THE BEST

- DK** ▶ PR electronics A/S tilbyder et bredt program af analoge og digitale signalbehandlingsmoduler til industriel automation. Programmet består af Isolatorer, Displays, Ex-barrierer, Temperaturtransmittere, Universaltransmittere mfl. Vi har modulerne, du kan stole på i selv barske miljøer med elektrisk støj, vibrationer og temperaturudsving, og alle produkter opfylder de strengeste internationale standarder. Vores motto »Signals the Best« er indbegrebet af denne filosofi – og din garanti for kvalitet.
- UK** ▶ PR electronics A/S offers a wide range of analogue and digital signal conditioning modules for industrial automation. The product range includes Isolators, Displays, Ex Interfaces, Temperature Transmitters, and Universal Modules. You can trust our products in the most extreme environments with electrical noise, vibrations and temperature fluctuations, and all products comply with the most exacting international standards. »Signals the Best« is the epitome of our philosophy – and your guarantee for quality.
- FR** ▶ PR electronics A/S offre une large gamme de produits pour le traitement des signaux analogiques et numériques dans tous les domaines industriels. La gamme de produits s'étend des transmetteurs de température aux afficheurs, des isolateurs aux interfaces SI, jusqu'aux modules universels. Vous pouvez compter sur nos produits même dans les conditions d'utilisation sévères, p.ex. bruit électrique, vibrations et fluctuations de température. Tous nos produits sont conformes aux normes internationales les plus strictes. Notre devise »SIGNALS the BEST« c'est notre ligne de conduite - et pour vous l'assurance de la meilleure qualité.
- DE** ▶ PR electronics A/S verfügt über ein breites Produktprogramm an analogen und digitalen Signalverarbeitungsmodulen für die industrielle Automatisierung. Dieses Programm umfasst Displays, Temperaturtransmitter, Ex- und galvanische Signaltrenner, und Universalgeräte. Sie können unsere Geräte auch unter extremen Einsatzbedingungen wie elektrisches Rauschen, Erschütterungen und Temperaturschwingungen vertrauen, und alle Produkte von PR electronics werden in Übereinstimmung mit den strengsten internationalen Normen produziert. »Signals the Best« ist Ihre Garantie für Qualität!

6 MM SERIES 2-WIRE TRANSMITTER ISOLATOR

3186

CONTENTS

| | |
|--|----|
| Warning | 2 |
| Safety instructions..... | 3 |
| Mounting and demounting of system 3100 | 5 |
| Installation on DIN rail | 6 |
| Marking..... | 6 |
| Side label..... | 7 |
| EC declaration of conformity | 8 |
| Applications..... | 9 |
| Technical characteristics | 9 |
| Mounting / installation..... | 9 |
| Order codes for 3186..... | 10 |
| Specifications | 10 |
| Connections | 13 |

NB.: Click on the entries in the table of contents to go to the desired section.

WARNING



GENERAL

To avoid the risk of electric shock and fire, the safety instructions of this guide must be observed and the guidelines followed. The specifications must not be exceeded, and the device must only be applied as described in the following. Prior to the commissioning of the device, this installation guide must be examined carefully. Only qualified personnel (technicians) should install this device. If the equipment is used in a manner not specified by the manufacturer, the protection provided by the equipment may be impaired. Until the device is fixed, do not connect hazardous voltages to the device.

Repair of the device must be done by PR electronics A/S only.



**HAZARD-
OUS
VOLTAGE**

In applications where hazardous voltage is connected to in-/outputs of the device, sufficient spacing or isolation from wires, terminals and enclosure - to surroundings (incl. neighbouring devices), must be ensured to maintain protection against electric shock.



CAUTION

Potential electrostatic charging hazard. To avoid the risk of explosion due to electrostatic charging of the enclosure, do not handle the units unless the area is known to be safe, or appropriate safety measures are taken to avoid electrostatic discharge.

SYMBOL IDENTIFICATION



Triangle with an exclamation mark: Read the manual before installation and commissioning of the device in order to avoid incidents that could lead to personal injury or mechanical damage.



The CE mark proves the compliance of the device with the essential requirements of the directives.



Ex devices have been approved according to the ATEX directive for use in connection with installations in explosive areas.

SAFETY INSTRUCTIONS

RECEIPT AND UNPACKING

Unpack the device without damaging it. The packing should always follow the device until this has been permanently mounted. Check at the receipt of the device whether the type corresponds to the one ordered.

ENVIRONMENT

Avoid direct sunlight, dust, high temperatures, mechanical vibrations and shock, as well as rain and heavy moisture. If necessary, heating in excess of the stated limits for ambient temperatures should be avoided by way of ventilation.

All devices can be used for Measurement Category II and Pollution Degree 2.

The module is designed to be safe at least under an altitude up to 2 000 m.

MOUNTING

Mounting and connection of the device should comply with national legislation for mounting of electric materials, i.e. wire cross section, protective fuse, and location. Descriptions of input / output and supply connections are shown in this installation guide and on the side label.

The device is provided with field wiring terminals and shall be supplied from a Power Supply having double / reinforced insulation. A power switch should be easily accessible and close to the device. The power switch shall be marked as the disconnecting unit for the device.

SYSTEM 3000 must be mounted on a DIN rail according to EN 60715.

UL installation

Use 60/75°C copper conductors only.

Wire size AWG 26-12

UL file number E314307

The device is an Open Type Listed Process Control Equipment. To prevent injury resulting from accessibility to live parts the equipment must be installed in an enclosure.

The power Supply unit must comply with NEC Class 2, as described by the National Electrical Code® (ANSI / NFPA 70).

cFmus installation in Division 2 or Zone 2

Class I, Div. 2, Group A, B, C, D T4 or I, Zone 2, AEx nA IIC T4 or Ex nA IIC T4.

In class I, Division 2 or Zone 2 installations, the subject equipment shall be mounted within a tool-secured enclosure which is capable of accepting one or more of Class I, Division 2 wiring methods specified in the National Electrical Code (ANSI/NFPA 70) or in Canada in the Canadian Electrical Code (C22.1).

The 3000 System Isolators and Converters must be connected to limited output NEC Class 2 circuits, as outlined in the National Electrical Code® (ANSI / NFPA 70), only. If the devices are connected to a redundant power supply (two separate power supplies), both must meet this requirement.

Where installed in outdoor or potentially wet locations the enclosure shall at a minimum meet the requirements of IP54.

Warning: Substitution of components may impair suitability for zone 2 / division 2.

Warning: To prevent ignition of the explosive atmospheres, disconnect power before servicing and do not separate connectors when energised and an explosive gas mixture is present.

Warning: Do not mount or remove devices from the power rail when an explosive gas mixture is present.

IECEX, ATEX installation in Zone 2

IECEX KEM 10.0068 X..... Ex nA IIC T4 Gc

KEMA 10ATEX0147 X..... II 3G Ex nA IIC T4 Gc

For safe installation the following must be observed. The device shall only be installed by qualified personnel who are familiar with the national and international laws, directives and standards that apply to this area.

Year of manufacture can be taken from the first two digits in the serial number.

The devices shall be installed in a suitable enclosure providing a degree of protection of at least IP54 according to EN60529, taking into account the environmental conditions under which the equipment will be used.

When the temperature under rated conditions exceeds 70°C at the cable or conduit entry point, or 80°C at the branching point of the conductors, the temperature specification of the selected cable shall be in compliance with the actual measured temperature.

Provisions shall be made to prevent the rated voltage from being exceeded by transient disturbances of more than 40%.

For installation on power rail in Zone 2, only Power Rail type 9400 supplied by Power Control Unit type 9410 is allowed.


To prevent ignition of the explosive atmospheres, disconnect power before servicing and do not separate connectors when energised and an explosive gas mixture is present.

Do not mount or remove devices from the power rail when an explosive gas mixture is present.

Cleaning

When disconnected, the device may be cleaned with a cloth moistened with distilled water.


MOUNTING AND DEMOUNTING OF SYSTEM 3100



Picture 1:

Mounting on DIN rail.

Click the device onto the rail




Picture 2:

Demounting from DIN rail

First, remember to demount the connectors with hazardous voltages.

Detach the device from the DIN rail by lifting the bottom lock.




Picture 3:

Wire size AWG 26-12 / 0.13 x 2.5 mm² stranded wire.

Screw terminal torque 0.5 Nm.


INSTALLATION ON DIN RAIL

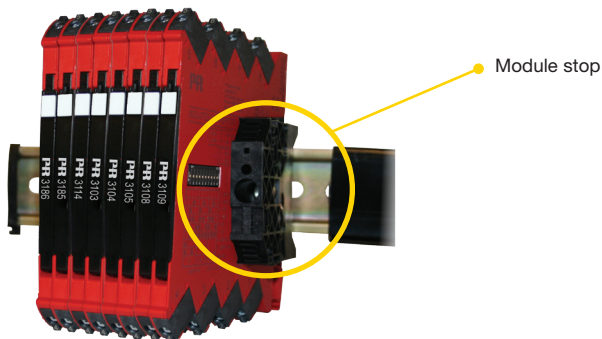

3186 must be supported by a module stop for marine applications.
(PR part number 9404).

MARKING

The front cover of the 3100 series has been designed with an area for affixation of a click-on marker. The area assigned to the marker measures 5 x 7.5 mm. Markers from Weidmüller's MultiCard System, type MF 5/7.5, are suitable.



SIDE LABEL

Terminal numbers

5 6 7 8



| | | | | | | | | | | | | | | | | | | |
|---|----|-----|---|--|-----|-----|---|-------|-----|-----|----|-----|---|-------|-----|--|--|--|
| PR electronics A/S, Lerbakken 10, 8410 Roende, Denmark Phone +45 9637 2677 www.prelectronics.com | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | |
| <table border="0"> <tr> <td>mA+</td> <td>In</td> <td>→ 4</td> <td>5</td> <td>→ Out</td> <td>mA+</td> </tr> <tr> <td>mA-</td> <td>In</td> <td>→ 3</td> <td>6</td> <td>→ Out</td> <td>mA-</td> </tr> </table> | | | | mA+ | In | → 4 | 5 | → Out | mA+ | mA- | In | → 3 | 6 | → Out | mA- | | | |
| mA+ | In | → 4 | 5 | → Out | mA+ | | | | | | | | | | | | | |
| mA- | In | → 3 | 6 | → Out | mA- | | | | | | | | | | | | | |
| | | | | Ex nA IIC T4 Gc IECEx KEM 10.00xx X | | | | | | | | | | | | | | |
| | | | | II 3 G Ex nA IIC T4 KEMA 10 ATEX 00xx X | | | | | | | | | | | | | | |
| | | | | CL I DIV2 Grp. A-D T4 AEx nA IIC T4 | | | | | | | | | | | | | | |
| | | | | OPEN TYPE PROCESS CONTROL EQUIPMENT 3PLU | | | | | | | | | | | | | | |
| Type no. { 3185-3101 -25°C < Ta < +70°C | | | | | | | | | | | | | | | | | | |

Pin connections

Approvals

4 3 2 1

EC DECLARATION OF CONFORMITY

As manufacturer

**PR electronics A/S
Lerbakken 10
DK-8410 Rønde**

hereby declares that the following product:

Type: 3186

is in conformity with the following directives and standards:

The EMC Directive 2004/108/EC and later amendments

EN 61326-1 : 2006

For specification of the acceptable EMC performance level, refer to the electrical specifications for the devices.

The Low Voltage Directive 2006/95/EC and later amendments

EN 61010-1 : 2001

The ATEX Directive 94/9/EC and later amendments

EN 60079-0 : 2009 and EN 60079-15 : 2005

ATEX certificate: KEMA 10ATEX0147 X

Notified body

**DEKRA Certification B.V. (0344)
Utrechtseweg 310, 6812 AR Arnhem
P.O. Box 5185, 6802 ED Arnhem
The Netherlands**



Rønde, 30 March 2012

Kim Rasmussen
Manufacturer's signature

3186: 2-WIRE TRANSMITTER ISOLATOR

- *1 or 2 channel 2-wire transmitter isolator*
- *Signal 1:1 functional range 3.5...23 mA*
- *Low channel voltage drop and fast response time*
- *Excellent accuracy*
- *Slimline 6mm housing*

Applications

- 1:1 output loop powered isolator of 2-wire transmitter current signals.
- An easy mounting DIN rail unit.
- A very competitive choice in terms of both price and technology for galvanic isolation of 2-wire transmitter signals.
- Provides surge suppression and protects control systems from transients and noise.
- Elimination of ground loops and measurement of floating signals.
- The device can be mounted in Safe area or in Zone 2 and Cl. 1 Div 2. area.

Technical characteristics

- 3186 is powered by the host loop voltage.
- Wide supply range from 6...35 V.
- Low input to output voltage drop typ 2.5 V.
- Excellent conversion accuracy, better than 0.05% in the range 3.8...20.5 mA.
- Functional range is 3.5...23mA which means that 3186 is NAMUR NE43 compliant.
- Inputs and outputs are floating and galvanically separated.
- High galvanic isolation of 2.5 kVAC.
- Fast response time < 5 msec.
- Excellent signal/noise ratio > 60 dB.

Mounting / installation

- DIN rail mounting with upto 330 channels per metre.
- Temperature operation range is from -25...+70°C.

Order codes for 3186:

| Type | Unit channels |
|---------------|---------------|
| 3186A1 | 1 |
| 3186A2 | 2 |

Accessories for 3186:

| Type | Function |
|-------------|-------------|
| 9404 | Module stop |

Specifications**Environmental conditions:**

| | |
|---|----------------------|
| Specifications range..... | -25°C to +70°C |
| Storage temperature | -40°C to +85°C |
| Calibration temperature..... | 20...28°C |
| Relative humidity | < 95% RH (non-cond.) |
| Protection degree..... | IP20 |
| Installation in pollution degree 2 & overvoltage category II. | |

Mechanical specifications:

| | |
|----------------------------|----------------------------------|
| Dimensions (HxWxD)..... | 113 x 6.1 x 115 mm |
| Weight approx. | 70 g |
| DIN rail type..... | DIN EN 60715 - 35mm |
| Wire size | 0.13...2.5 mm ² / AWG |
| | 26...12 stranded wire |
| Screw terminal torque..... | 0.5 Nm |

Common electrical specifications:

| | |
|--|------------------------|
| Supply voltage..... | 6...35 VDC |
| Voltage drop, input to output typ..... | 2.5 V |
| Internal consumption | 50 mW per channel |
| Isolation voltage, test | 2.5 kVAC |
| Working isolation voltage | 300 VAC / 250 VAC (Ex) |
| Signal / noise ratio | > 60 dB |
| Response time (0...90%, 100...10%) | < 5 ms |
| Cut- off frequency (3 dB)..... | 100 Hz |

Input and Output specifications:

| | |
|---|---------------|
| Available input transmitter (Tx) supply | 3.5...32.5 V |
| Signal range, input to output | 3.8...20.5 mA |
| Signal conversion | 1:1 |
| Functional range..... | 3.5...23 mA |
| Output loop current limitation, typ | 24 mA |
| Current output overload, max | 50 mA |

| Accuracy values | | |
|-----------------|--------------------------|--|
| Input type | Absolute accuracy | Temperature coefficient $\Delta^{\circ}\text{C} = [\text{Tamb} - 25^{\circ}\text{C}]$ |
| mA | $\leq \pm 8 \mu\text{A}$ | $\leq \pm 0.02 \mu\text{A} \times (\Delta^{\circ}\text{C} \times \text{Vsupply}) @ \text{Tamb} > 25^{\circ}\text{C}$ $\leq \pm 0.07 \mu\text{A} \times (\Delta^{\circ}\text{C} \times \text{Vsupply}) @ \text{Tamb} < 25^{\circ}\text{C}$ |

Accuracy calculation example -> Tamb = 50°C and Vsupply = 24 VDC:

Total accuracy = Absolute accuracy + Temperature coefficient
 $= \pm (8 \mu\text{A} + (0.02 \mu\text{A} \times (25^{\circ}\text{C} \times 24\text{V}))) = \leq \pm 20 \mu\text{A}$

| | |
|---------------------------------------|-----------------------|
| EMC immunity influence | < $\pm 0.5\%$ of span |
| Extended EMC immunity: | |
| NAMUR NE 21, A criterion, burst | < $\pm 1\%$ of span |

* of span = 4...20 mA

Approvals:

| | |
|-------------------------------|------------|
| EMC 2004/108/EC | EN 61326-1 |
| LVD 2006/95/EC..... | EN 61010-1 |
| UL, Standard for Safety | UL 61010-1 |
| Safe Isolation..... | EN 61140 |
| GOST R | |

Marine:


| | |
|--|-----------------------------|
| Det Norske Veritas, Ships & Offshore | Stand. f. Certific. No. 2.4 |
| Germanischer Lloyd | VI-7-2 |

Ex:

| | |
|-------------------|-------------------|
| ATEX 94/9/EC..... | KEMA 10ATEX0147 X |
| IECEx..... | KEM 10.0068 X |
| c FM us | 3041043 -C |

CONNECTIONS

3186

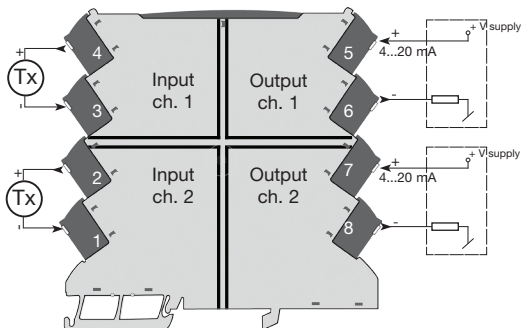



Displays Programmable displays with a wide selection of inputs and outputs for display of temperature, volume and weight, etc. Feature linearisation, scaling, and difference measurement functions for programming via PReset software.



Ex interfaces Interfaces for analogue and digital signals as well as HART® signals between sensors / I/P converters / frequency signals and control systems in Ex zone 0, 1 & 2 and for some modules in zone 20, 21 & 22.



Isolation Galvanic isolators for analogue and digital signals as well as HART® signals. A wide product range with both loop-powered and universal isolators featuring linearisation, inversion, and scaling of output signals.
























Temperature A wide selection of transmitters for DIN form B mounting and DIN rail modules with analogue and digital bus communication ranging from application-specific to universal transmitters.



Universal PC or front programmable modules with universal options for input, output and supply. This range offers a number of advanced features such as process calibration, linearisation and auto-diagnosis.



- 
 www.preelectronics.fr
 sales@preelectronics.fr
- 
 www.preelectronics.de
 sales@preelectronics.de
- 
 www.preelectronics.es
 sales@preelectronics.es
- 
 www.preelectronics.it
 sales@preelectronics.it
- 
 www.preelectronics.se
 sales@preelectronics.se
- 
 www.preelectronics.co.uk
 sales@preelectronics.co.uk
- 
 www.preelectronics.com
 sales@preelectronics.com

Head office

Denmark
 PR electronics A/S
 Lerbakken 10
 DK-8410 Rønne

www.preelectronics.com
sales@preelectronics.dk
 tel. +45 86 37 26 77
 fax +45 86 37 30 85



QUALITY SYSTEM AND ENVIRONMENTAL MANAGEMENT SYSTEM
 DS/EN ISO 9001
 DS/EN ISO 14001

