PERFORMANCE MADE SMARTER

Pt100 cable sensor

7430B

- All-purpose sensor / insert
- Ø6 x 60 mm
- For tasks that require interchangeable inserts

Technical characteristics

- Accuracy: IEC 60751, class A
- Process attachment: thermowell or adjustable coupling
- Outer protective sheath: stainless acid-proof steel, Wno. 1.4571 (AISI 316Ti)
- Withstands vibrations
- Measuring insert: Fixed
- Temperature range min/max: -50...+180°C
- Connection: 5, meters, 4-wire silicone cable 0.25 mm[sup]2[/sup]

Applications

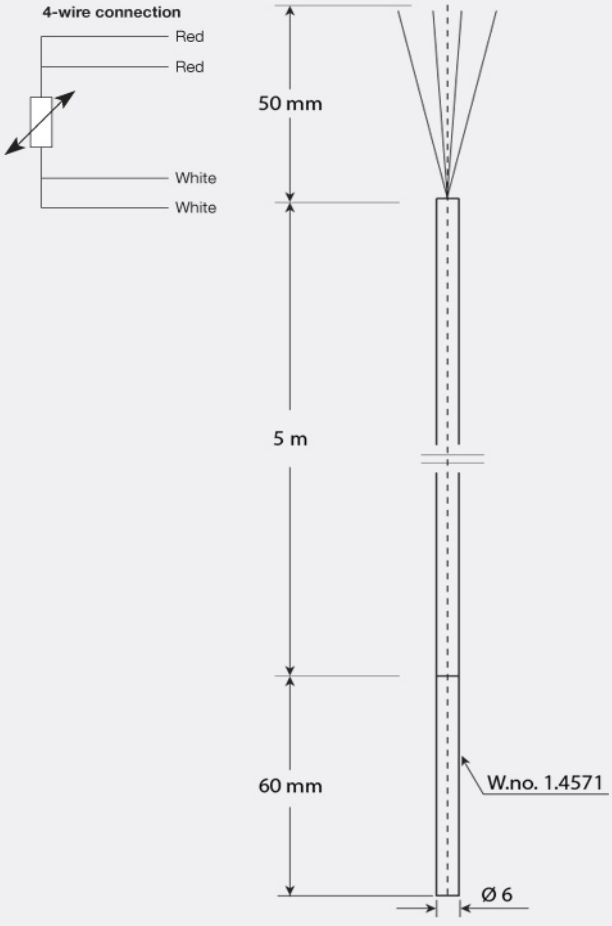

This page is automatically generated on the basis of information provided on www.prelectronics.com and affiliated websites. It is provided to you as a service and for information purpose only. While we have attempted to maintain the information as accurately as possible, the page may contain errors or omissions for which we disclaim any and all liability