

PERFORMANCE  
MADE  
SMARTER

Product manual

**5333**

**2-wire programmable transmitter**



Segurança  
INMETRO



TEMPERATURE | I.S. INTERFACES | COMMUNICATION INTERFACES | MULTIFUNCTIONAL | ISOLATION | DISPLAY

No. 5333V123-UK  
From ser. no. 261676022


**PR**  
electronics

# 6 Product Pillars

## *to meet your every need*

### Individually outstanding, unrivalled in combination

With our innovative, patented technologies, we make signal conditioning smarter and simpler. Our portfolio is composed of six product areas, where we offer a wide range of analog and digital devices covering over a thousand applications in industrial and factory automation. All our products comply with or surpass the highest industry standards, ensuring reliability in even the harshest of environments and have a 5-year warranty for greater peace of mind.



Our range of temperature transmitters and sensors provides the highest level of signal integrity from the measurement point to your control system. You can convert industrial process temperature signals to analog, bus or digital communications using a highly reliable point-to-point solution with a fast response time, automatic self-calibration, sensor error detection, low drift, and top EMC performance in any environment.



We deliver the safest signals by validating our products against the toughest safety standards. Through our commitment to innovation, we have made pioneering achievements in developing I.S. interfaces with SIL 2 Full Assessment that are both efficient and cost-effective. Our comprehensive range of analog and digital intrinsically safe isolation barriers offers multifunctional inputs and outputs, making PR an easy-to-implement site standard. Our backplanes further simplify large installations and provide seamless integration to standard DCS systems.



We provide inexpensive, easy-to-use, future-ready communication interfaces that can access your PR installed base of products. All the interfaces are detachable, have a built-in display for readout of process values and diagnostics, and can be configured via push-buttons. Product specific functionality includes communication via Modbus and Bluetooth and remote access using our PR Process Supervisor (PPS) application, available for iOS and Android.



Our unique range of single devices covering multiple applications is easily deployable as your site standard. Having one variant that applies to a broad range of applications can reduce your installation time and training, and greatly simplify spare parts management at your facilities. Our devices are designed for long-term signal accuracy, low power consumption, immunity to electrical noise and simple programming.



Our compact, fast, high-quality 6 mm isolators are based on microprocessor technology to provide exceptional performance and EMC-immunity for dedicated applications at a very low total cost of ownership. They can be stacked both vertically and horizontally with no air gap separation between units required.



Our display range is characterized by its flexibility and stability. The devices meet nearly every demand for display readout of process signals and have universal input and power supply capabilities. They provide a real-time measurement of your process value no matter the industry and are engineered to provide a user-friendly and reliable relay of information, even in demanding environments.

# 2-wire programmable transmitter 5333

## Table of contents

|  |    |
|--|----|
| Application .....                          | 4  |
| Technical characteristics .....            | 4  |
| Mounting / installation .....              | 4  |
| Applications .....                         | 4  |
| Order .....                                | 5  |
| Accessories .....                          | 5  |
| Electrical specifications .....            | 5  |
| Connections .....                          | 7  |
| Block diagram .....                        | 7  |
| Programming .....                          | 8  |
| Mechanical specifications .....            | 8  |
| Mounting of sensor wires .....             | 8  |
| ATEX Installation Drawing - 5333A .....    | 9  |
| ATEX Installation Drawing - 5333D .....    | 11 |
| IECEX Installation Drawing - 5333A .....   | 13 |
| IECEX Installation Drawing - 5333D .....   | 15 |
| FM Installation Drawing - 5333D .....      | 17 |
| CSA Installation Drawing - 5333A .....     | 19 |
| CSA Installation Drawing - 5333D .....     | 20 |
| INMETRO Installation Drawing - 5333A ..... | 21 |
| INMETRO Installation Drawing - 5333D ..... | 23 |
| Document history .....                     | 25 |

# 2-wire programmable transmitter 5333

- RTD or Ohm input
- High measurement accuracy
- 3-wire connection
- Programmable sensor error value
- For DIN form B sensor head mountings

## Application

- Linearised temperature measurement with Pt100... Pt1000 or Ni100...Ni1000 sensor.
- Conversion of linear resistance variation to a standard analog current signal, for instance from valves or Ohmic level sensors.


## Technical characteristics

- Within a few seconds the user can program PR5333 to measure temperatures within all RTD ranges defined by the norms.
- The RTD and resistance inputs have cable compensation for 3-wire connection.

## Mounting / installation

- For DIN form B sensor head mounting. In non-hazardous areas the 5333 can be mounted on a DIN rail with the PR fitting type 8421.

## Applications

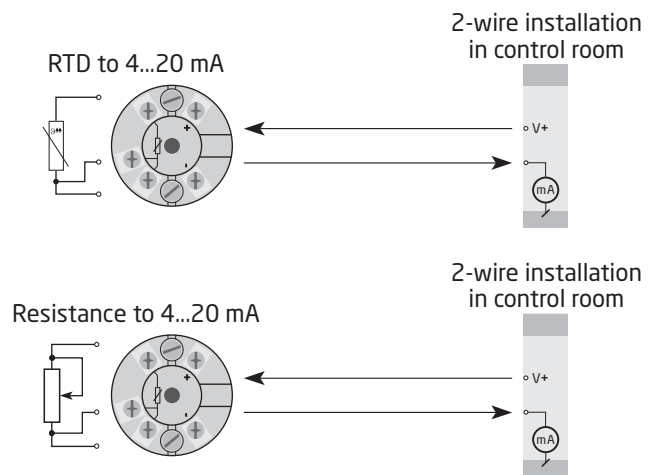

## Order

| Type | Version                                       |
|------|---|
| 5333 | Zone 2 / Div. 2 : A                           |
|      | Zone 0, 1, 2, 21, 22, M1 / DIV. 1, DIV. 2 : D |

## Accessories

|      |   |
|------|---|
| 5909 | = Loop Link USB interface and PReset Software |
|------|---|

## Electrical specifications

### Environmental conditions:

|  |                      |
|--|----------------------|
| Operating temperature                    | -40°C to +85°C       |
| Calibration temperature                  | 20...28°C            |
| Humidity                                 | < 95% RH (non-cond.) |
| Protection degree, enclosure / terminals | IP68 / IP00          |

### Mechanical specifications:

|                       |                                       |
|-----------------------|---------------------------------------|
| Dimensions            | Ø 44 x 20.2 mm                        |
| Weight                | 50 g                                  |
| Max. wire size        | 1 x 1.5 mm <sup>2</sup> stranded wire |
| Screw terminal torque | 0.4 Nm                                |
| Vibration             | IEC 60068-2-6                         |
| 2...25 Hz             | ±1.6 mm                               |
| 25...100 Hz           | ±4 g                                  |

### Common specifications:

|                                    |                        |
|------------------------------------|------------------------|
| Supply voltage, DC                 |                        |
| 5333A                              | 8.0...35 VDC           |
| 5333D                              | 8.0...30 VDC           |
| Internal power dissipation         |                        |
| 5333A                              | 25 mW...0.8 W          |
| 5333D                              | 25 mW...0.7 W          |
| Voltage drop                       | 8.0 VDC                |
| Warm-up time                       | 5 min.                 |
| Programming                        | Loop Link              |
| Signal / noise ratio               | > 60 dB                |
| Response time (programmable)       | 0.33...60 s            |
| Signal dynamics, input             | 19 bit                 |
| Signal dynamics, output            | 16 bit                 |
| Effect of supply voltage variation | < 0.005% of span / VDC |

Accuracy, the greater of general and basic values:

| General values |                   |                         |
|----------------|-------------------|-------------------------|
| Input type     | Absolute accuracy | Temperature coefficient |
| All            | ≤ ±0.1% of span   | ≤ ±0.01% of span / °C   |

| Basic values |                |                         |
|--------------|----------------|-------------------------|
| Input type   | Basic accuracy | Temperature coefficient |
| RTD          | ≤ ±0.3°C       | ≤ ±0.01°C/°C            |
| Lin. R       | ≤ ±0.2 Ω       | ≤ ±20 mΩ / °C           |

|                          |                 |
|--------------------------|-----------------|
| EMC - immunity influence | < ±0.5% of span |
|--------------------------|-----------------|

**Electrical specifications, input:****RTD and linear resistance input:**

| RTD type          | Min. value | Max. value | Min. span | Standard  |
|-------------------|------------|------------|-----------|-----------|
| Pt100...Pt1000    | -200°C     | +850°C     | 25°C      | IEC 60751 |
| Ni100...Ni1000    | -60°C      | +250°C     | 25°C      | DIN 43760 |
| Linear resistance | 0 Ω        | 10000 Ω    | 30 Ω      | -----     |

|  |                          |
|--|--------------------------|
| Max. offset                                | 50% of selec. max. value |
| Cable resistance per wire (max.)           | 10 Ω                     |
| Sensor current                             | > 0.2 mA, < 0.4 mA       |
| Effect of sensor cable resistance (3-wire) | < 0.002 Ω / Ω            |
| Sensor error detection                     | Yes                      |

**Output:****Current output:**

|                   |   |
|-------------------|---|
| Signal range      | 4...20 mA   |
| Min. signal range | 16 mA   |
| Updating time     | 135 ms  |
| Load resistance   | $\leq (V_{\text{supply}} - 8.0) / 0.023 [\Omega]$ |
| Load stability    | < $\pm 0.01\%$ of span / 100 Ω                    |

**Sensor error detection:**

|                      |             |
|----------------------|-------------|
| Programmable         | 3.5...23 mA |
| NAMUR NE43 Upscale   | 23 mA       |
| NAMUR NE43 Downscale | 3.5 mA      |

Of span = Of the presently selected range

**Observed authority requirements:**

|        |                |
|--------|----------------|
| EMC    | 2014/30/EU     |
| ATEX   | 2014/34/EU     |
| RoHS   | 2011/65/EU     |
| EAC    | TR-CU 020/2011 |
| EAC Ex | TR-CU 012/2011 |

**Marine approval:**


|                       |            |
|-----------------------|------------|
| DNV, Ships & Offshore | TAA0000101 |
|-----------------------|------------|

**Ex / I.S. approvals:**


|                |                             |
|----------------|-----------------------------|
| 5333A:         |                             |
| ATEX           | DEKRA 20ATEX0106X           |
| 5333D:         |                             |
| ATEX           | DEKRA 20ATEX0105X           |
| FM             | FM17US0013X                 |
| PESO           | P658959/1                   |
| 5333A & 5333D: |                             |
| IECEX          | DEK 20.0062X                |
| CSA            | 1125003                     |
| INMETRO        | DEKRA 23.0010X              |
| EAC Ex         | EAEU KZ 7500361.01.01.08756 |

# Connections


## Input:

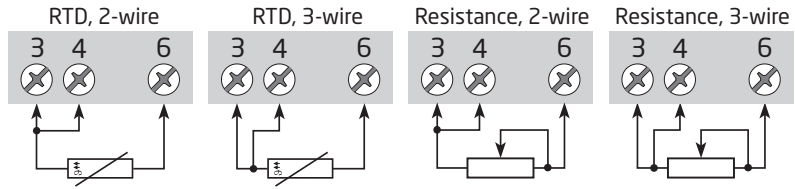

## Output:




## Block diagram


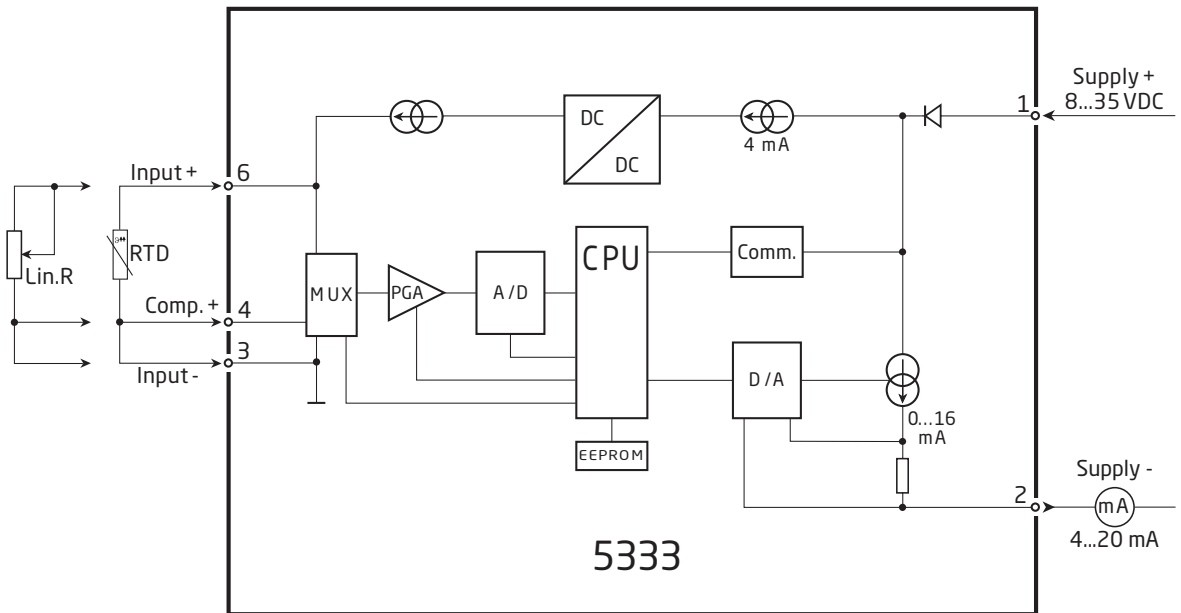


# Programming


- Loop Link is a communications interface that is needed for programming 5333.
- For programming please refer to the drawing below and the help functions in PReset.
- Loop link is not approved for communication with modules installed in hazardous (Ex) areas.

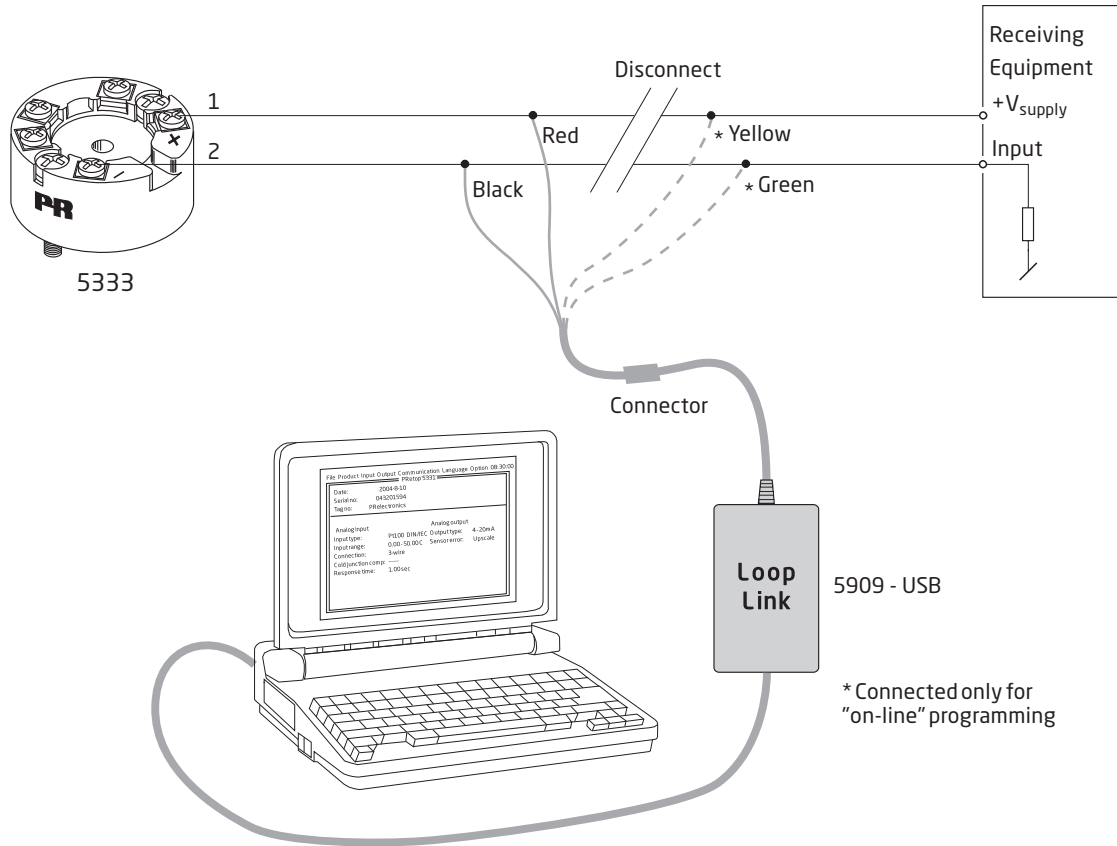

## Mechanical specifications

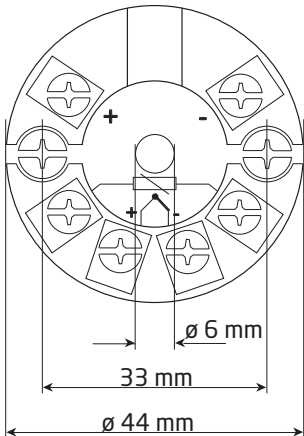

## Mounting of sensor wires

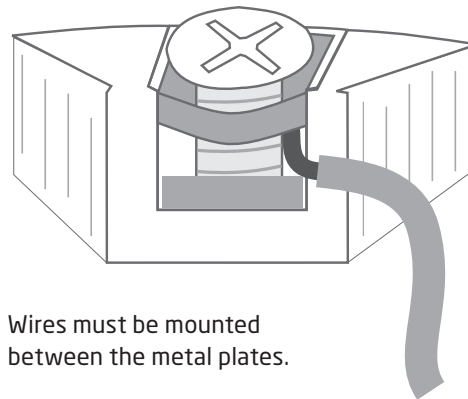

Wires must be mounted between the metal plates.

# ATEX-installation drawing 5333QA02-V3R0

For safe installation of 5333A the following must be observed. The module shall only be installed by qualified personnel who are familiar with the national and international laws, directives and standards that apply to this area. Year of manufacture can be taken from the first two digits in the serial number.

ATEX Certificate      DEKRA 20ATEX0106 X

Marking



II 3 G Ex nA [ic] IIC T6 ... T4 Gc  
 II 3 G Ex ec [ic] IIC T6 ... T4 Gc  
 II 3 G Ex ic IIC T6 ... T4 Gc  
 II 3 D Ex ic IIIC Dc

Standards

EN 60079-0: 2018, EN 60079-11: 2012,  
 EN 60079-15: 2010, EN 60079-7:2015 +A1: 2018

|   |   |   |                                      |
|---|---|---|--------------------------------------|
| Terminal 3,4,6  | Terminal 1,2  | Terminal 1,2  | Terminal 1,2                         |
| Ex ic IIC, Ex ic IIIC   | Ex ic IIC, Ex ic IIIC                               | Ex ic IIC, Ex ic IIIC                               | Ex nA, Ex ec                         |
| Uo: 5 V<br>Io: 4.0 mA<br>Po: 20 mW<br>Lo: 900 mH<br>Co: 1000 µF | Ui = 35 V<br>Ii = 110 mA<br>Ci = 1 nF<br>Li = 10 µH | Ui = 24 V<br>Ii = 260 mA<br>Ci = 1 nF<br>Li = 10 µH | Umax ≤ 35 VDC<br>or<br>Umax ≤ 24 VDC |

| Ex ic IIC, Ex ic IIIC<br>Temperature<br>Class | Ambient temperature range |                |
|---|---------------------------|----------------|
|   | Ui=35 V                   | Ui=24 V        |
| <b>T6</b>                                     | -40°C to +54°C            | -40°C to +63°C |
| <b>T5</b>                                     | -40°C to +69°C            | -40°C to +78°C |
| <b>T4</b>                                     | -40°C to +85°C            | -40°C to +85°C |

| Ex ec, Ex nA<br>Temperature<br>Class | Ambient temperature range |                |
|--------------------------------------|---------------------------|----------------|
|                                      | Vmax=35 V                 | Vmax=24 V      |
| <b>T6</b>                            | -40°C to +43°C            | -40°C to +55°C |
| <b>T5</b>                            | -40°C to +85°C            | -40°C to +85°C |
| <b>T4</b>                            | -40°C to +85°C            | -40°C to +85°C |

## Installation notes

If the enclosure is made of non-metallic plastic materials, electrostatic charges on the transmitter enclosure shall be avoided.

If the transmitter is installed in an explosive atmosphere requiring the use of equipment protection level Gc and applied in type of protection Ex ic, the transmitter shall be mounted in an enclosure that provides a degree of protection of at least IP20 according to EN 60529, and that is suitable for the application and correctly installed.

If the transmitter is installed in an explosive atmosphere requiring the use of equipment protection level Dc, the transmitter shall be mounted in a separately certified enclosure that provides a degree of protection of at least IP5X according to EN 60079-0, and that is suitable for the application and correctly installed. The surface temperature of the outer enclosure is +20 K above the ambient temperature, determined without a dust layer. Ambient temperature range: -40°C to +85°C.

If the transmitter is installed in an explosive atmosphere requiring the use of equipment protection level Gc and applied in type of protection Ex nA or Ex ec, the transmitter shall be mounted in a separately certified enclosure that provides a degree of protection of at least IP54 according to EN 60079-0, and that is suitable for the application and correctly installed.

If the transmitter is installed in an explosive atmosphere requiring the use of equipment protection level Gc and applied in type of protection Ex nA or Ex ec, the equipment shall only be used in an area of not more than pollution degree 2, as defined in EN 60664-1.

# ATEX-installation drawing 5333QA01-V3R0



For safe installation of 5333D the following must be observed. The module shall only be installed by qualified personnel who are familiar with the national and international laws, directives and standards that apply to this area. Year of manufacture can be taken from the first two digits in the serial number.

ATEX Certificate      DEKRA 20ATEX0105 X


Marking



II 1 G Ex ia IIC T6...T4 Ga  
II 2 D Ex ia IIIC Db  
I M1 Ex ia I Ma

Standards

EN 60079-0: 2018, EN 60079-11: 2012

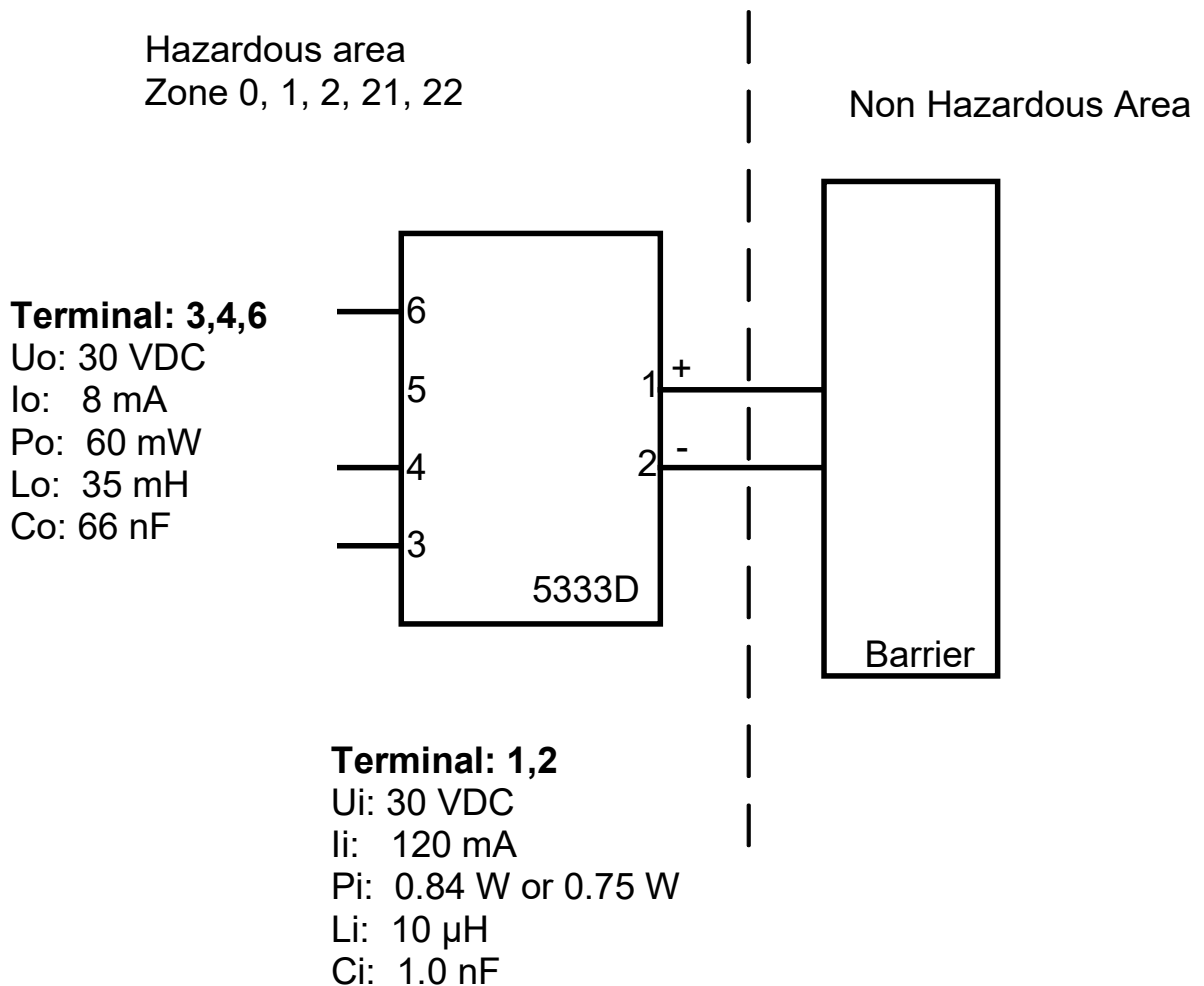

| Temperature Class | Ambient temperature range |                |
|-------------------|---------------------------|----------------|
|                   | Pi: 0.84 W                | Pi: 0.75 W     |
| <b>T6</b>         | -40°C to +47°C            | -40°C to +50°C |
| <b>T5</b>         | -40°C to +62°C            | -40°C to +65°C |
| <b>T4</b>         | -40°C to +85°C            | -40°C to +85°C |

## Installation notes

If the enclosure is made of non-metallic plastic materials, electrostatic charges on the transmitter enclosure shall be avoided.

If the transmitter is installed in an explosive atmosphere requiring the use of equipment protection level Ga, the transmitter shall be mounted in an enclosure that provides a degree of protection of at least IP20 according to EN 60529, and that is suitable for the application and correctly installed.

If the transmitter is installed in an explosive atmosphere requiring the use of equipment protection level Ga or Ma, and if the enclosure is made of aluminum, it must be installed such, that ignition sources due to impact and friction sparks are excluded.

If the transmitter is installed in an explosive atmosphere requiring the use of equipment protection level Db, the transmitter shall be mounted in a separately certified enclosure that provides a degree of protection of at least IP5X according to EN 60079-0, and that is suitable for the application and correctly installed. The surface temperature of the outer enclosure is +20 K above the ambient temperature, determined without a dust layer.  
Ambient temperature range: -40°C to +85°C.

If the transmitter is installed in an explosive atmosphere requiring the use of equipment protection level Ma, the transmitter shall be mounted in an enclosure that provides a degree of protection of at least IP54 according to EN 60529, and that is suitable for the application and correctly installed.  
Ambient temperature range: -40°C to +85°C.

Cable entries and blanking elements shall be used that are suitable for the application and correctly installed.

For an ambient temperature  $\geq 60^\circ\text{C}$ , heat resistant cables shall be used with a rating of at least 20 K above the ambient temperature.

# IECEX-installation drawing 5333QI02-V3R0

For safe installation of 5333A the following must be observed. The module shall only be installed by qualified personnel who are familiar with the national and international laws, directives and standards that apply to this area. Year of manufacture can be taken from the first two digits in the serial number.

Certificate IECEX DEK 20.0062X

Marking Ex nA [ic] IIC T6 ... T4 Gc  
 Ex ec [ic] IIC T6 ... T4 Gc  
 Ex ic IIC T6 ... T4 Gc  
 Ex ic IIIC Dc

Standards IEC 60079-0: 2017, IEC 60079-11: 2011,  
 IEC 60079-15: 2010, IEC 60079-7:2017

|   |   |   |                                      |
|---|---|---|--------------------------------------|
| Terminal 3,4,5,6  | Terminal 1,2  | Terminal 1,2  | Terminal 1,2                         |
| Ex ic IIC, Ex ic IIIC   | Ex ic IIC, Ex ic IIIC                               | Ex ic IIC, Ex ic IIIC                               | Ex nA, Ex ec                         |
| Uo: 5 V<br>Io: 4 mA<br>Po: 20 mW<br>Lo: 900 mH<br>Co: 1000 µF | Ui = 35 V<br>Ii = 110 mA<br>Ci = 1 nF<br>Li = 10 µH | Ui = 24 V<br>Ii = 260 mA<br>Ci = 1 nF<br>Li = 10 µH | Umax ≤ 35 VDC<br>or<br>Umax ≤ 24 VDC |

| Ex ic IIC, Ex ic IIIC<br>Temperature<br>Class | Ambient temperature range |                |
|---|---------------------------|----------------|
|   | Ui=35 V                   | Ui=24 V        |
| <b>T6</b>                                     | -40°C to +54°C            | -40°C to +63°C |
| <b>T5</b>                                     | -40°C to +69°C            | -40°C to +78°C |
| <b>T4</b>                                     | -40°C to +85°C            | -40°C to +85°C |

| Ex ec, Ex nA<br>Temperature<br>Class | Ambient temperature range |                |
|--------------------------------------|---------------------------|----------------|
|                                      | Vmax=35 V                 | Vmax=24 V      |
| <b>T6</b>                            | -40°C to +43°C            | -40°C to +55°C |
| <b>T5</b>                            | -40°C to +85°C            | -40°C to +85°C |
| <b>T4</b>                            | -40°C to +85°C            | -40°C to +85°C |

## Installation notes

If the enclosure is made of non-metallic plastic materials, electrostatic charges on the transmitter enclosure shall be avoided.

If the transmitter is installed in an explosive atmosphere requiring the use of equipment protection level Gc and applied in type of protection Ex ic, the transmitter shall be mounted in an enclosure that provides a degree of protection of at least IP20 according to IEC 60529, and that is suitable for the application and correctly installed.

If the transmitter is installed in an explosive atmosphere requiring the use of equipment protection level Dc, the transmitter shall be mounted in a separately certified enclosure that provides a degree of protection of at least IP5X according to IEC 60079-0, and that is suitable for the application and correctly installed. The surface temperature of the outer enclosure is +20 K above the ambient temperature, determined without a dust layer.  
Ambient temperature range: -40°C to +85°C.

If the transmitter is installed in an explosive atmosphere requiring the use of equipment protection level Gc and applied in type of protection Ex nA or Ex ec, the transmitter shall be mounted in a separately certified enclosure that provides a degree of protection of at least IP54 according to IEC 60079-0, and that is suitable for the application and correctly installed.


If the transmitter is installed in an explosive atmosphere requiring the use of equipment protection level Gc and applied in type of protection Ex nA or Ex ec, the equipment shall only be used in an area of not more than pollution degree 2, as defined in IEC 60664-1.

# IECEX-installation drawing 5333QI01-V3R0



For safe installation of 5333D the following must be observed. The module shall only be installed by qualified personnel who are familiar with the national and international laws, directives and standards that apply to this area. Year of manufacture can be taken from the first two digits in the serial number.

|             |   |
|-------------|---|
| Certificate | IECEX DEK 20.0062X                                  |
| Marking     | Ex ia IIC T6...T4 Ga<br>Ex ia IIIC Db<br>Ex ia I Ma |
| Standards   | IEC 60079-0: 2017, IEC 60079-11: 2011               |

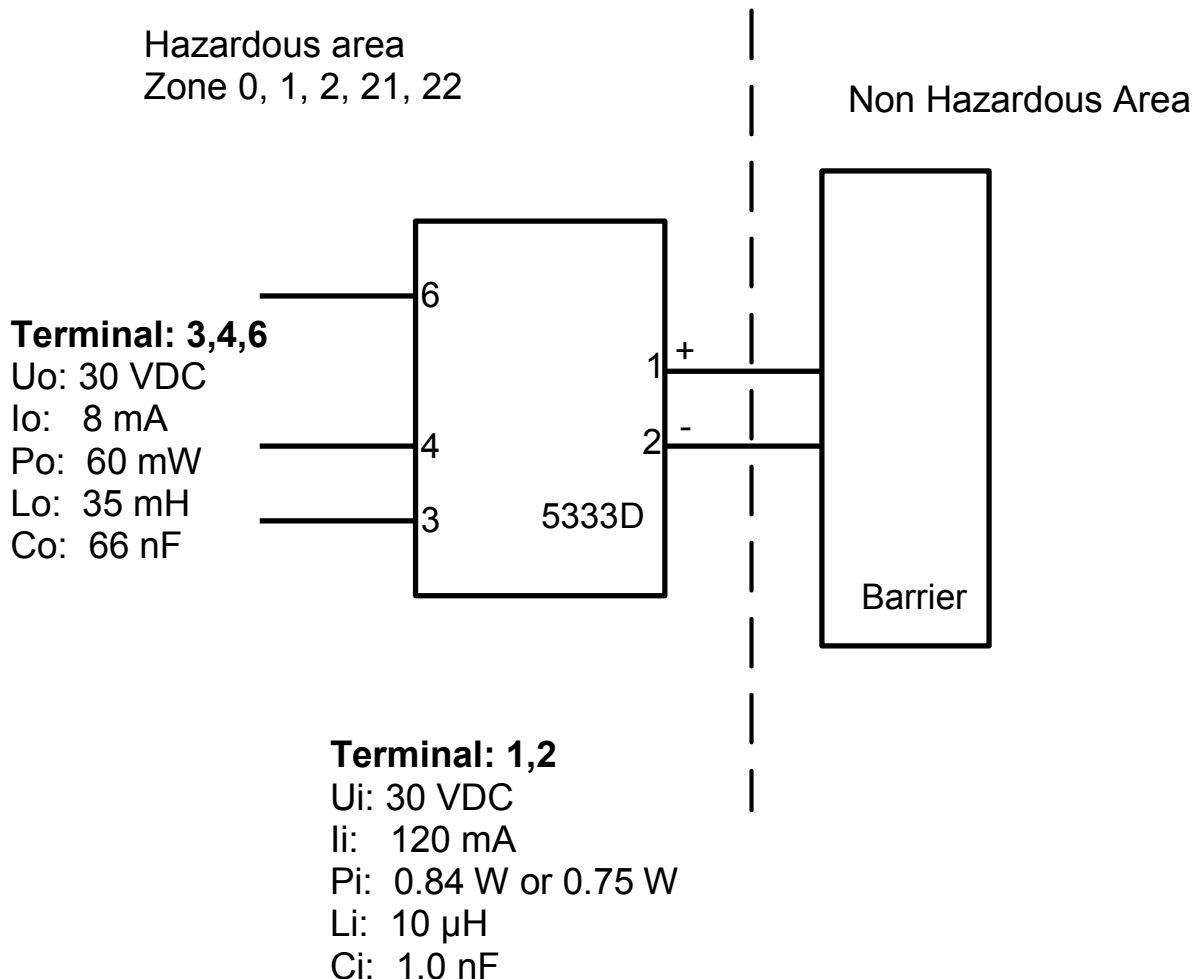

| Temperature Class | Ambient temperature range |                |
|-------------------|---------------------------|----------------|
|                   | Pi: 0.84 W                | Pi: 0.75 W     |
| <b>T6</b>         | -40°C to +47°C            | -40°C to +50°C |
| <b>T5</b>         | -40°C to +62°C            | -40°C to +65°C |
| <b>T4</b>         | -40°C to +85°C            | -40°C to +85°C |

## Installation notes

If the enclosure is made of non-metallic plastic materials, electrostatic charges on the transmitter enclosure shall be avoided.

If the transmitter is installed in an explosive atmosphere requiring the use of equipment protection level Ga, the transmitter shall be mounted in an enclosure that provides a degree of protection of at least IP20 according to IEC 60529, and that is suitable for the application and correctly installed.

If the transmitter is installed in an explosive atmosphere requiring the use of equipment protection level Ga or Ma, and if the enclosure is made of aluminum, it must be installed such, that ignition sources due to impact and friction sparks are excluded.

If the transmitter is installed in an explosive atmosphere requiring the use of equipment protection level Db, the transmitter shall be mounted in a separately certified enclosure that provides a degree of protection of at least IP5X according to IEC 60079-0, and that is suitable for the application and correctly installed. The surface temperature of the outer enclosure is +20 K above the ambient temperature, determined without a dust layer.  
Ambient temperature range: -40°C to +85°C.

If the transmitter is installed in an explosive atmosphere requiring the use of equipment protection level Ma, the transmitter shall be mounted in an enclosure that provides a degree of protection of at least IP54 according to IEC 60529, and that is suitable for the application and correctly installed.  
Ambient temperature range: -40°C to +85°C.

Cable entries and blanking elements shall be used that are suitable for the application and correctly installed.

For an ambient temperature  $\geq 60^\circ\text{C}$ , heat resistant cables shall be used with a rating of at least 20 K above the ambient temperature.

## FM Installation Drawing


### Model 5331D, 5332D, 5333D and 5343B

#### Hazardous (Classified) Location

Class I, Division 1, Groups, A, B, C, D T4..T6  
Class I, Zone 0, AEx ia IIC T4..T6

Ambient temperature limits  
T4: -40 to +85 deg. Celcius  
T6: -40 to +60 deg. Celcius

Terminal 1, 2  
Vmax or Ui: 30 V  
Imax or Ii: 120 mA  
Pmax or Pi: 0.84 W  
Ci: 1 nF  
Li: 10 uH

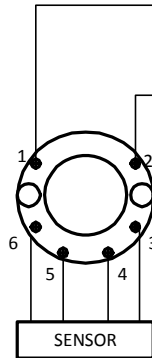

#### Non Hazardous Location

Associated Apparatus  
or Barrier  
with  
entity Parameters:

$UM \leq 250V$   
 $Voc \text{ or } Uo \leq Vmax \text{ or } Ui$   
 $Isc \text{ or } Io \leq Imax \text{ or } Ii$   
 $Po \leq Pi$   
 $Ca \text{ or } Co \geq Ci + Ccable$   
 $La \text{ or } Lo \geq Li + Lcable$

This device must not be connected  
to any associated apparatus which  
uses or generates more than 250  
VRMS

### Model 5335D, 5337D


#### Hazardous (Classified) Location

Class I, Division 1, Groups, A, B, C, D T4..T6  
Class I, Zone 0, AEx ia IIC T4..T6

Ambient temperature limits  
T4: -40 to +85 deg. Celcius  
T6: -40 to +60 deg. Celcius

Terminal 1, 2  
Vmax or Ui: 30 V  
Imax or Ii: 120 mA  
Pmax or Pi: 0.84 W  
Ci: 1 nF  
Li: 10 uH

Terminal 3, 4, 5, 6  
Vt or Uo: 9.6 V  
It or Io: 28 mA  
Pt or Po: 67.2 mW  
Ca or Co: 3.5 uF  
La or Lo: 35 mH

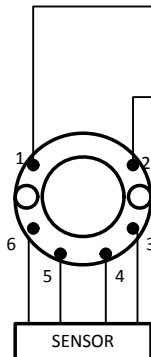

#### Non Hazardous Location

Associated Apparatus  
or Barrier  
with  
entity Parameters:

$UM \leq 250V$   
 $Voc \text{ or } Uo \leq Vmax \text{ or } Ui$   
 $Isc \text{ or } Io \leq Imax \text{ or } Ii$   
 $Po \leq Pi$   
 $Ca \text{ or } Co \geq Ci + Ccable$   
 $La \text{ or } Lo \geq Li + Lcable$

This device must not be connected  
to any associated apparatus which  
uses or generates more than 250  
VRMS

**The entity concept**

The Transmitter must be installed according to National Electrical Code (ANSI-NFPA 70) and shall be installed with the enclosure, mounting, and spacing segregation requirement of the ultimate application.

Equipment that is FM-approved for intrinsic safety may be connected to barriers based on the ENTITY CONCEPT. This concept permits interconnection of approved transmitters, meters and other devices in combinations which have not been specifically examined by FM, provided that the agency's criteria are met. The combination is then intrinsically safe, if the entity concept is acceptable to the authority having jurisdiction over the installation.

The entity concept criteria are as follows:

The intrinsically safe devices, other than barriers, must not be a source of power.

The maximum voltage  $U_i(V_{MAX})$  and current  $I_i(I_{MAX})$ , and maximum power  $P_i(P_{max})$ , which the device can receive and remain intrinsically safe, must be equal to or greater than the voltage ( $U_o$  or  $V_{OC}$  or  $V_t$ ) and current ( $I_o$  or  $I_{SC}$  or  $I_t$ ) and the power  $P_o$  which can be delivered by the barrier.

The sum of the maximum unprotected capacitance ( $C_i$ ) for each intrinsically device and the interconnecting wiring must be less than the capacitance ( $C_a$ ) which can be safely connected to the barrier.

The sum of the maximum unprotected inductance ( $L_i$ ) for each intrinsically device and the interconnecting wiring must be less than the inductance ( $L_a$ ) which can be safely connected to the barrier.

The entity parameters  $U_o, V_{OC}$  or  $V_t$  and  $I_o, I_{SC}$  or  $I_t$ , and  $C_a$  and  $L_a$  for barriers are provided by the barrier manufacturer.

**NI Field Circuit Parameters**


**Model 5331D, 5332D, 5333D, 5335D, 5337D and 5343B**

**Hazardous (Classified) Location**

Class I, Division 2, Groups, A,B,C,D T4..T6  
Class I, Zone 2, IIC T4..T6

Ambient temperature limits  
T4: -40 to + 85 deg. Celcius  
T6: -40 to + 60 deg. Celcius

Terminal 1 , 2  
 $V_{max}$  : 35 V  
 $C_i$ : 1.0 nF  
 $L_i$ :10 uH

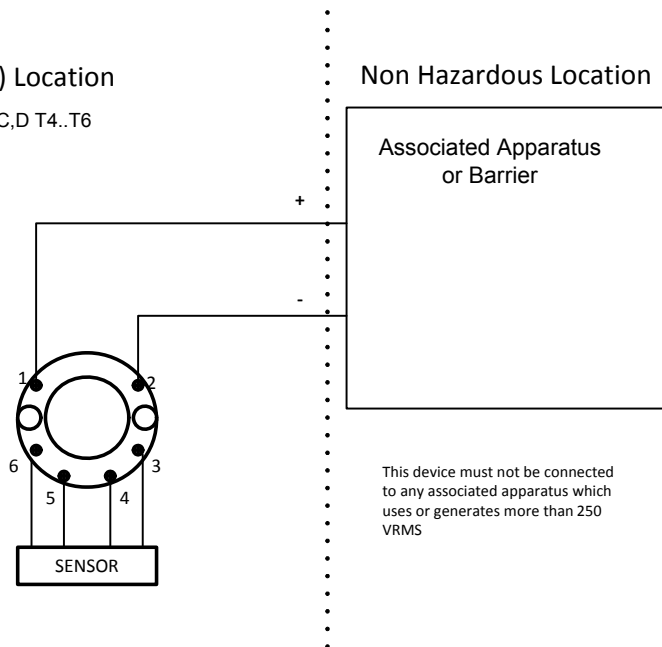

For safe installation of the 5333A the following must be observed. The module shall only be installed by qualified personnel who are familiar with the national and international laws, directives and standards that apply to this area.

**Marking**

Class I, Division 2, Group A,B,C,D T6...T4  
Ex nA[ic] IIC T6...T4  
Class I Zone 2 AEx nA[ic] IIC T6...T4

**Hazardous Area**


CL I, Div 2, GP ABCD  
CL I, Zone 2, IIC

T4: -40°C to 85 °C  
T6: -40°C to 60 °C

**Terminal:**

**3,4,6**

Uo: 5 VDC  
Io: 4 mA  
Po: 20 mW  
Lo: 900 mH  
Co: 1000 µF

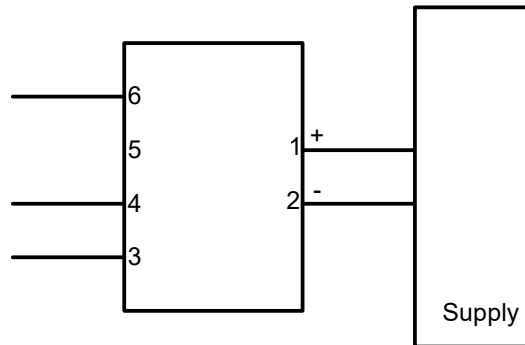

**Terminal:**

**1-2**

Functional Ratings:  
U nominal ≤ 35 VDC;  
I nominal ≤ 3.5 - 23 mA

**NI Installation instructions**

The transmitter must be installed in an enclosure providing a degree of protection of at least IP54 according to IEC60529 that is suitable for the application and is correctly installed. Cable entry devices and blanking elements shall fulfill the same requirements.

If the enclosure is made of non-metallic materials or of painted metal, electrostatic charging shall be avoided.

Use supply wires with a rating of at least 5 K above the ambient temperature.

Supply from a Class 2 Power Supply with Transient protection or equivalent.

WARNING: Substitution of components may impair suitability for Class I, Division 2

AVERTISSEMENT: la substitution de composants peut nuire à l'aptitude à la Classe I, Division 2.

WARNING: Do not disconnect equipment unless power has been switched off or the area is known to be safe.

AVERTISSEMENT: Ne débranchez pas l'équipement sauf si l'alimentation a été coupée ou si la zone est connue pour être sûre.

**Non Incendive field wiring installation**

The non incendive field Wiring Circuit concept allows interconnection of Nonincendive Field wiring Apparatus with Associated Nonincendive Field Wiring Apparatus or Associated Intrinsically Safe Apparatus or Associated Apparatus not specially examined in combination as a system using any of the wiring methods permitted for unclassified locations,

$Voc < Vmax$ ,  $Ca \geq Ci + Ccable$ ,  $La \geq Li + Lcable$ .

# CSA Installation drawing 533XQC03 – V6R0

Hazardous area


T4:  $-40 \leq T_a \leq 85^\circ\text{C}$   
 T6:  $-40 \leq T_a \leq 60^\circ\text{C}$

Non Hazardous Area

## Module 5331D and 5333D

### Terminal: 3,4,5,6

Only passive, or non-energy storing devices such as RTD's and Thermocouples may be connected

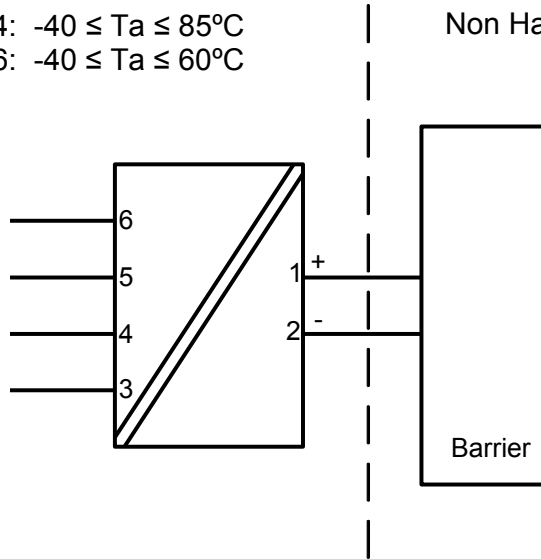

|                      |
|----------------------|
| <b>Terminal: 1,2</b> |
| Ui: 30 VDC           |
| Ii: 120 mA           |
| Pi: 0.84 W           |
| Li: 10 $\mu\text{H}$ |
| Ci: 1.0 nF           |

## Module 5335D and 5337D

| Terminal: 3,4,5,6     | Terminal: 1,2       |
|-----------------------|---------------------|
| Uo: 9.6 VDC           | Ui: 30 VDC          |
| Io: 28 mA             | Ii: 120 mA          |
| Po: 67.2 mW           | Pi: 0.84 W          |
| Lo: 35 mH             | Li: 0 $\mu\text{H}$ |
| Co: 3.5 $\mu\text{F}$ | Ci: 1.0 nF          |

**CLASS 2258 04 - PROCESS CONTROL EQUIPMENT** - Intrinsically Safe Entity - For Hazardous Locations

**CLASS 2258 84 - PROCESS CONTROL EQUIPMENT** - Intrinsically Safe Entity - For Hazardous Locations - Certified to US Standards

Class I, Division 1, Groups A, B, C and D T6...T4

Ex ia IIC T6...T4 Ga

Class I, Zone 0, AEx ia IIC Ga

### Warning:

Substitution of components may impair intrinsic safety.

The transmitters must be installed in a suitable enclosure to meet installation codes stipulated in the Canadian Electrical Code (CEC) or for US the National Electrical Code (NEC).

## Desenho de Instalação INMETRO



Para instalação segura do 5333A ou 5343A o seguinte deve ser observado. O modelo deve apenas ser instalado por pessoas qualificadas que são familiarizadas com as leis nacionais e internacionais, diretrizes e padrões que se aplicam a esta área.

O ano de fabricação pode ser pego dos dois primeiros dígitos do número de série.

Certificado DEKRA 23.0010 X

Marcas  
 Ex ec [ic] IIC T6..T4 Gc  
 Ex ic IIC T6..T4 Gc  
 Ex ic IIIC Dc

Normas  
**ABNT NBR IEC 60079-0:2020 Versão Corrigida:2023**  
**ABNT NBR IEC 60079-7:2018 Versão Corrigida:2022**  
**ABNT NBR IEC 60079-11:2013 Versão Corrigida:2017**

| Terminais 3,4,5,6   | Terminais 1,2                                       | Terminais 1,2                                       | Terminais 1,2                        |
|---|---|---|--------------------------------------|
| Ex ic IIC, Ex ic IIIC   | Ex ic IIC, Ex ic IIIC                               | Ex ic IIC, Ex ic IIIC                               | Ex ec                                |
| Uo: 5 V<br>Io: 4 mA<br>Po: 20 mW<br>Lo: 900 mH<br>Co: 1000 µF | Ui = 35 V<br>Ii = 110 mA<br>Ci = 1 nF<br>Li = 10 µH | Ui = 24 V<br>Ii = 260 mA<br>Ci = 1 nF<br>Li = 10 µH | Umax ≤ 35 Vdc<br>or<br>Umax ≤ 24 Vdc |

| Ex ic IIC, Ex ic IIIC<br>Classe de temperatura | Faixa de temperatura ambiente |                  |
|--|-------------------------------|------------------|
|  | Ui=35V                        | Ui=24V           |
| <b>T6</b>                                      | -40 °C to +54 °C              | -40 °C to +63 °C |
| <b>T5</b>                                      | -40 °C to +69 °C              | -40 °C to +78 °C |
| <b>T4</b>                                      | -40 °C to +85 °C              | -40 °C to +85 °C |

| Ex ec<br>Classe de temperatura | Faixa de temperatura ambiente |                  |
|--------------------------------|-------------------------------|------------------|
|                                | Umax=35V                      | Umax=24V         |
| <b>T6</b>                      | -40 °C to +43 °C              | -40 °C to +55 °C |
| <b>T5</b>                      | -40 °C to +85 °C              | -40 °C to +85 °C |
| <b>T4</b>                      | -40 °C to +85 °C              | -40 °C to +85 °C |

**Notas para instalação**

Se o invólucro for feito de materiais plásticos não metálicos, devem ser evitadas cargas eletrostáticas no invólucro do transmissor.

Se o transmissor for instalado em uma atmosfera explosiva que exija o uso de nível de proteção de equipamento Gc e aplicado no tipo de proteção Ex ic, o transmissor deverá ser montado em um gabinete que forneça um grau de proteção de pelo menos IP20 de acordo com ABNT NBR IEC 60529, e adequado à aplicação e instalado corretamente.

Se o transmissor for instalado em uma atmosfera explosiva que exija o uso de nível de proteção de equipamento Dc, o transmissor deverá ser montado em um invólucro certificado separadamente que forneça um grau de proteção de pelo menos IP5X de acordo com a ABNT NBR IEC 60079-0, e que seja adequado para o aplicativo e instalado corretamente. A temperatura da superfície do invólucro externo é +20 K acima da temperatura ambiente, determinada sem camada de poeira.  
Faixa de temperatura ambiente: -40 °C a +85 °C

Se o transmissor for instalado em uma atmosfera explosiva que exija o uso de nível de proteção de equipamento Gc e aplicado no tipo de proteção Ex ec, o transmissor deverá ser montado em um invólucro certificado separadamente que forneça um grau de proteção de pelo menos IP54 de acordo com conforme ABNT NBR IEC 60079-0, e que seja adequado à aplicação e instalado corretamente.

Se o transmissor for instalado em uma atmosfera explosiva que exija o uso de nível de proteção de equipamento Gc e aplicado no tipo de proteção Ex ec, o equipamento deverá ser usado somente em uma área com grau de poluição não superior a 2, conforme definido na IEC 60664-1.

## Desenho de Instalação INMETRO




Para instalação segura do 5333D ou 5343B o seguinte deve ser observado. O modelo deve apenas ser instalado por pessoas qualificadas que são familiarizadas com as leis nacionais e internacionais, diretrizes e padrões que se aplicam a esta área.  
O ano de fabricação pode ser pego dos dois primeiros dígitos do número de série.

|             |   |
|-------------|---|
| Certificado | DEKRA 23.0010 X   |
| Marcas      | Ex ia IIC T6...T4 Ga<br>Ex ia IIIC Da<br>Ex ia I Ma   |
| Normas      | <b>ABNT NBR IEC 60079-0:2020 Versão Corrigida:2023</b><br><b>ABNT NBR IEC 60079-11:2013 Versão Corrigida:2017</b> |

Áreas classificadas  
Zona 0, 1, 2, 20, 21, 22

T4:  $-40 \leq T_a \leq 85^\circ\text{C}$   
T5:  $-40 \leq T_a \leq 60^\circ\text{C}$   
T6:  $-40 \leq T_a \leq 45^\circ\text{C}$

**Terminais:**  
**3,4,5,6**  
Uo: 30 VDC  
Io: 8 mA  
Po: 60 mW  
Lo: 35 mH  
Co: 66 nF

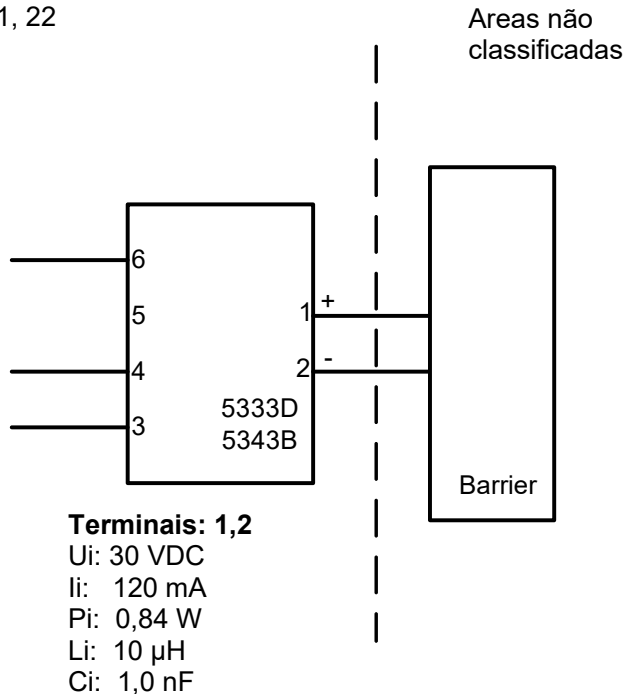

**Notas de Instalação.**

Em uma atmosfera de gás potencialmente explosiva, o transmissor deve ser montado em um invólucro a fim de garantir no mínimo um grau de proteção IP20 de acordo com ABNT NBR IEC60529. Se contudo o ambiente necessitar um nível de proteção maior, isso deve ser levado em consideração.

Se o transmissor é instalado em uma atmosfera explosiva exigindo o uso de equipamento de proteção de nível Ga, Ma e Mb, e se o invólucro for feito de alumínio, ele deve ser instalado de modo que, mesmo em caso de avaria remota, fontes de ignição devido a impacto e fricção, faíscas são eliminadas; Se o invólucro é feito de materiais não metálicos, cargas eletroestáticas devem ser evitadas.

Se o invólucro é feito de materiais não metálicos, cargas eletroestáticas devem ser evitadas.

Para instalação em atmosfera de poeira potencialmente explosiva, as instruções a seguir são aplicáveis:

O transmissor deve ser montado em invólucro de metal forma B de acordo com DIN43729 que está fornecendo pelo menos um grau de proteção IP6X de acordo com ABNT NBR IEC60529. O invólucro deve ser adequado para aplicação pretendida e instalado corretamente.

As entradas dos cabos e os elementos de obturação que podem ser utilizados devem ser adequados à aplicação pretendida e corretamente instalados.

Para temperatura ambiente  $\geq 60^{\circ}\text{C}$ , fios de resistência ao calor devem ser usados com uma faixa de pelo menos 20K acima da temperatura ambiente.

## Document history

The following list provides notes concerning revisions of this document.

| <b>Rev. ID</b> | <b>Date</b> | <b>Notes</b>  |
|----------------|-------------|---|
| 111            | 1345        | IECEX and INMETRO approvals added.  |
| 112            | 1514        | PESO/CCOE approval added.<br>GOST approval replaced with EAC approval.                      |
| 113            | 1707        | FM installation drawing updated.<br>INMETRO installation drawings updated.                  |
| 114            | 1848        | FM installation drawing updated.  |
| 115            | 1935        | CSA approval for 5333A received. Installation drawing added.<br>CCOE approval discontinued. |
| 116            | 2004        | INMETRO installation drawing updated.   |
| 117            | 2139        | ATEX and IECEx approvals updated - Ex na changed to Ex ec.                                  |
| 118            | 2202        | CSA installation drawings updated.  |
| 119            | 2245        | UKCA added.   |
| 120            | 2345        | INMETRO approval updated - Ex nA replaced by Ex ec.   |
| 121            | 2507        | New EAC Ex certificate.   |
| 122            | 2605        | CSA installation drawing for 5333D updated.<br>UKCA discontinued.                           |
| 123            | 2620        | PESO approval added.  |

# We are near you, *all over the world*

**Our trusted red boxes are supported wherever you are**

All our devices are backed by expert service and a 5-year warranty. With each product you purchase, you receive personal technical support and guidance, day-to-day delivery, repair without charge within the warranty period and easily accessible documentation.

We are headquartered in Denmark, and have offices and authorized partners the world over. We are a local

business with a global reach. This means that we are always nearby and know your local markets well. We are committed to your satisfaction and provide PERFORMANCE MADE SMARTER all around the world.

For more information on our warranty program, or to meet with a sales representative in your region, visit [prelectronics.com](http://prelectronics.com).

# Benefit today from *PERFORMANCE MADE SMARTER*

PR electronics is the leading technology company specialized in making industrial process control safer, more reliable and more efficient. Since 1974, we have been dedicated to perfecting our core competence of innovating high precision technology with low power consumption. This dedication continues to set new standards for products communicating, monitoring and connecting our customers' process measurement points to their process control systems.

Our innovative, patented technologies are derived from our extensive R&D facilities and from having a great understanding of our customers' needs and processes. We are guided by principles of simplicity, focus, courage and excellence, enabling some of the world's greatest companies to achieve PERFORMANCE MADE SMARTER.