

Take your *temperature measurement* *to the next level*

PERFORMANCE
MADE
SMARTER



Introducing PR 5437

First of the next generation of temperature transmitters, HART 7 capability together with IEC 61508-2010 full assessment up to SIL 3, the PR 5437 offers unrivalled performance for the most demanding of applications.

TEMPERATURE | I.S. INTERFACES | COMMUNICATION INTERFACES | MULTIFUNCTIONAL | ISOLATION | DISPLAY

The PR 5437 is designed to meet the challenges and increased expectations of modern process control. Groundbreaking features and specifications mean you can now experience performance made smarter.

PR
electronics


Global install base *+5 million temperature transmitters*

For over 40 years, PR electronics has driven innovation in temperature signal conditioning. By introducing numerous patented technologies, we are enabling our customers to realize long-term efficiencies and reliability.

Our uncompromising approach to quality and product performance – even in the most demanding of environments – has made PR electronics the manufacturer of choice for many of the world's biggest companies, and

has reinforced our position as a world leader in temperature transmitter manufacturing.

Designed for modern and automated high capacity in-house manufacturing to fully support customer demands into the future

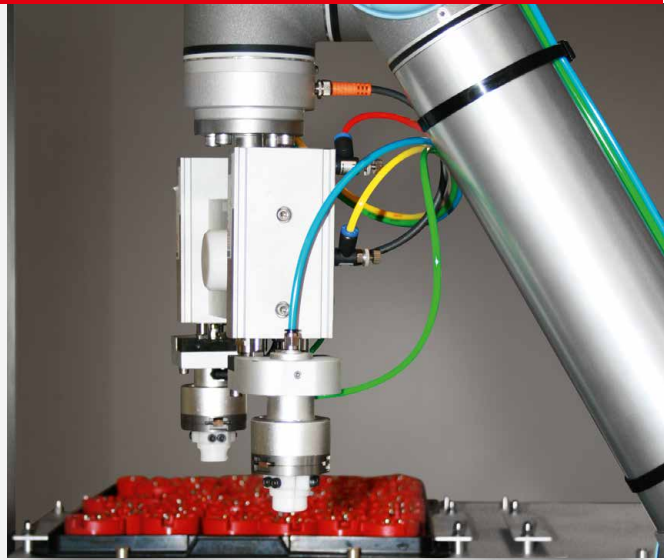

Pioneers in programmable temperature transmitter technology and performance



The PR 5437 is equipped with an extensive suite of approvals for hazardous area and marine applications worldwide.



* EU RO member organizations: ABS, BV, CCS, CRS, DNV, KR, LR, ClassNK, PRS, RINA and RS.

Highest performance *Zero compromise*


With the PR 5437, it is now possible to obtain maximum accuracy measurements with the highest EMC immunity, across the widest range of process and ambient

temperatures. With PR electronics' excellent reputation backed up by an extensive suite of functional safety, hazardous area and marine approvals,

the PR 5437 delivers benefits across the full range of non-hazardous and intrinsically safe process applications worldwide.

True dual sensor input

Flexible dual input capability, with choice of output modes.

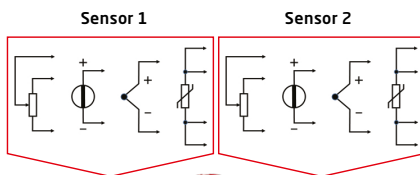

Output modes

Sensor 1
Sensor 2
Average
Differential
Redundant
Internal Temp.
Fixed

4...20 mA

SIL 2 / SIL 3

Designed to meet functional safety requirements of safety instrumented systems up to SIL 3.

- Full Functional Safety Assessment to SIL 2 acc. IEC 61508-2010.
- Firmware assessed to SIL 3.
- SIL 3 capable in 1oo2 configuration using two PR devices.
- Enhanced EMC FS testing according to IEC 61236-3-1.



SIL 2



SIL 3

Superior specifications

- Ambient temperature range -50°C to +85°C (SIL: -40°C to +80°C)
- Temperature coefficient < 0.005% / °C
- Long term stability < 0.18% / 5 years
- Accuracy < 0.05°C*
- EMC - immunity influence < ±0.1% of span

* for all Pt100 spans




Performance *made smarter*

Dual sensor input options

Unrivalled dual input versatility means the PR 5437 can be used in the widest range of applications. High-density 7-terminal design allows up to 2x4-wire RTD input for high accuracy processes.


Extensive input combinations are possible to meet the most demanding of applications.

Dual Sensor Configurations		
Sensor 1		Sensor 2
RTD 2, 3, 4 W		RTD 2, 3, 4 W
TC	(int. CJC)	TC
TC	(ext. CJC 2, 3, 4 W)	TC
TC	(int. CJC)	RTD 2, 3, 4 W
TC	(ext. CJC 2, 3 W)	RTD 2, 3, 4 W
Potentiometer 3, 4, 5 W		Potentiometer 3, 4 W
Voltage		Voltage

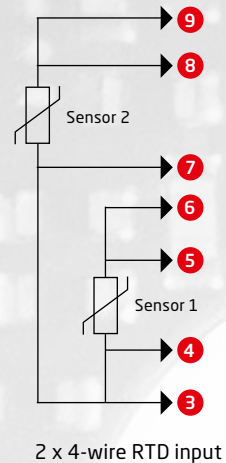


Sensor redundancy

Sensor redundancy maintains process availability and safety by seamlessly switching to backup sensor in the event of primary sensor failure. An alert via HART can be used to allow scheduling of maintenance on the faulty sensor.

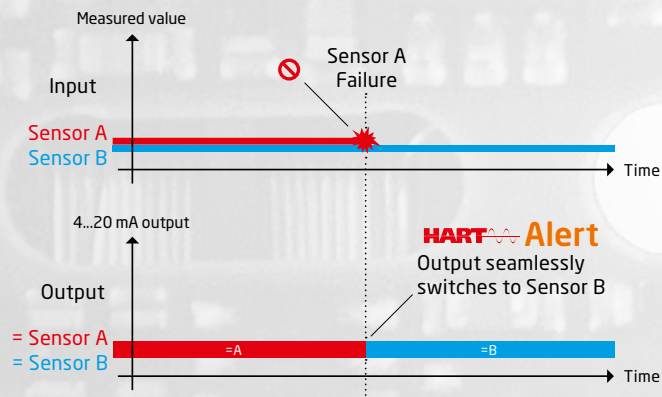

Sensor drift detection

Sensor drift detection helps maintain measuring point reliability. By alerting when a sensor drifts beyond a user-configured level, scheduled maintenance can be accurately defined, or process given immediate attention.

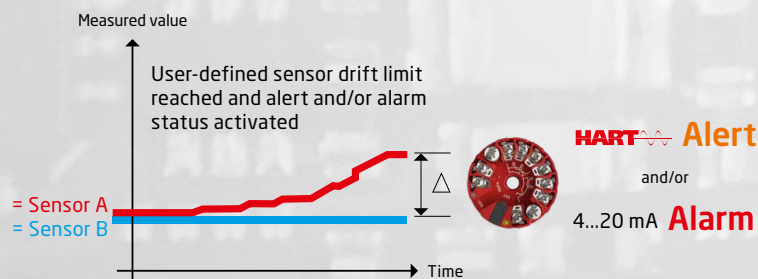


Improved process optimization and reporting capability

Operating data is available to logging and asset management systems, including min. / .max tracking and runtime metering.


Runtime metering of each separate sensor input as well as internal transmitter temperatures allow fine-tuning of process and statistical traceability.

User-defined metering and sensor limit ranges improve diagnostics and allow tighter control and logging of process variances and out of range / limit events, resulting in increased quality and yields.

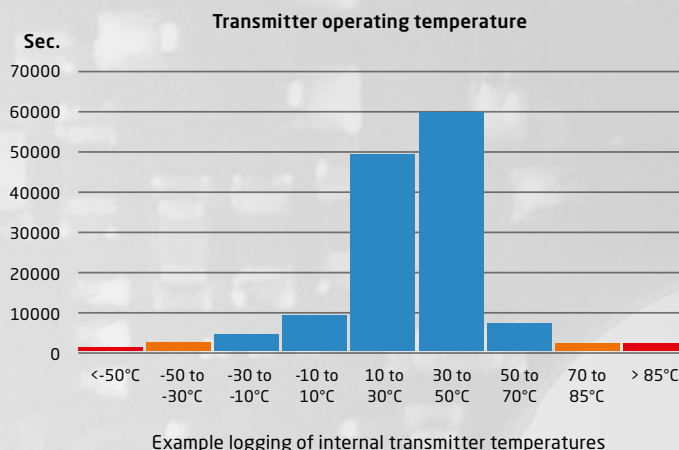

SIL certification

Full third party functional safety assessment to SIL 2 / SIL 3.
According to IEC 61508-2010 including firmware assessment to SIL 3 incl. SIL enable/disable function to suit individual applications.

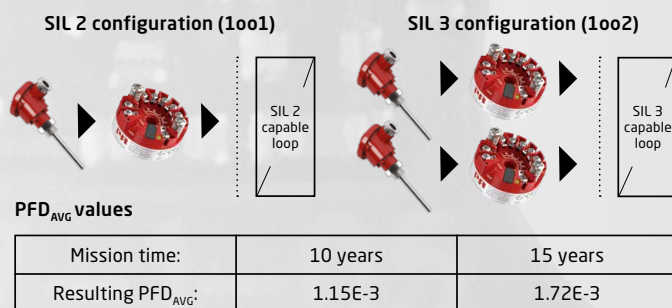

PFD values support a proof test interval \geq transmitter working life.

Improved diagnostics

The PR 5437 fully supports NAMUR NE107. NE107 is a recommendation from the NAMUR organization for "Self-monitoring and diagnosis of field devices" detailing how to make use of diagnostics in intelligent devices.

Defined status bits are used to convey diagnostic information from the device which is used by EDDL* based intelligent device management (IDM) software to assign and generate device diagnostic alarm filtering and dashboard displays etc.


All diagnostics are assigned a category as below:

Status signal	Category	Typical description
	Failed	Malfunction in the device or sensor - e.g. sensor / CJC error
	Out of specification	Ambient or process conditions are out of range or below minimum requirement - e.g. internal temperature alarm
	Maintenance required	Advisory - e.g. sensor drift detected
	Check function	Signal temporarily suspended - e.g. incorrect configuration

*EDDL - Electronic device description language

Performance across *every specification*

Setting the benchmark

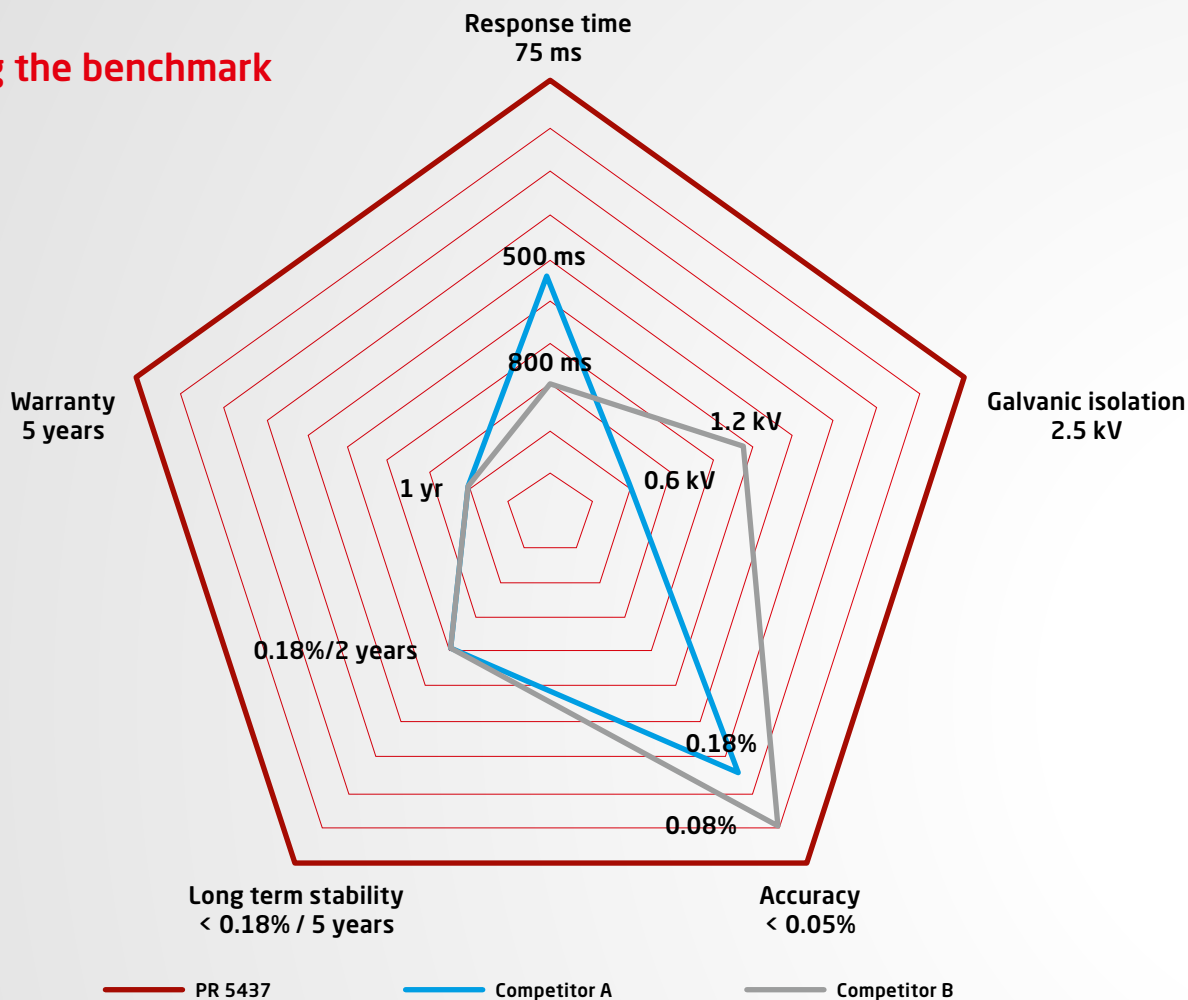

Accuracy: < 0.05°C*

Superior accuracy ensures true, reliable measurements.

Response time: 75 ms

Fastest response time easily supports safety and cost-critical applications where fast reaction to temperature changes is vital.

Temperature coefficient: From < 0.005% / °C

Very low temperature coefficient ensuring maximum accuracy across changing ambient conditions.

Long term stability: < 0.18% / 5 years


Assured stable repeatability over installation lifetime.

High isolation: 2.5 kVAC / 55 VAC (42 VAC for I.S. versions)

Higher galvanic isolation provides maximum protection from ground loops, high voltage transients and common mode interference.

Power supply: 7.5 V...48 VDC (30 V for I.S. versions)

Extended loop supply range, giving higher loop loading capability.

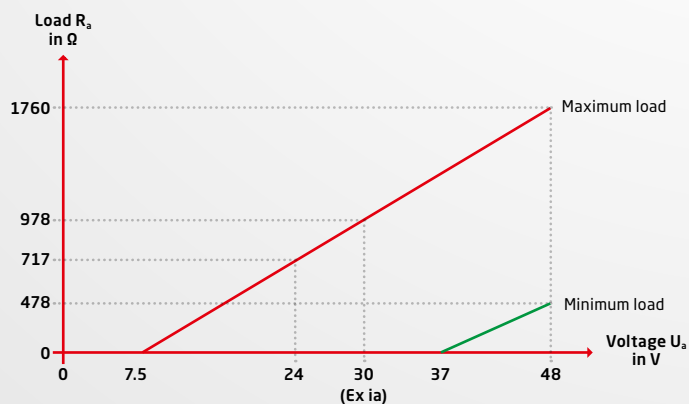

* for all Pt100 spans

Raising *the bar*



Since 1974, we have been setting the benchmark, developing new and better standards within signal conditioning – and with the PR 5437, we have done it again.

Patent for: Simultaneous error detection

A patented technique of continuous out-of-frequency sensor measurement has been developed to allow the most rapid response to sensor error/wire breakage while simultaneously enabling extremely fast signal measurement. Full compatibility with digital process simulators is also ensured.

Patent (pending) for: Power supply

A patented power supply design has been developed which allows for full concurrent support of 3 high accuracy sensors (dual sensors and CJC) ensuring stability and accuracy of measurements.

NAMUR *standards*

NAMUR NE21, IEC EN 61326-3-1

Extended EMC immunity testing by accredited laboratory according to NAMUR NE21, Criterion A, Burst. Meets IEC EN 61326-3-1 requirements ensuring stable functional safety performance in high EMC-prone installations.

NAMUR NE44

NAMUR compliant fault indication.

NAMUR NE43 & NE89


NAMUR compliant signaling, cable-break detection and device status reporting.

NAMUR NE107

NAMUR compliant diagnostic capability, for improved plant optimization and availability.

Sensor matching: Sensor-defined, CvD or custom

Widest range of standardized RTD inputs (e.g. IEC 60751, JIS C 1604-81, GOST) are accepted. For improved sensor matching a number of linearization options are possible including Callendar Van Dusen (CvD).

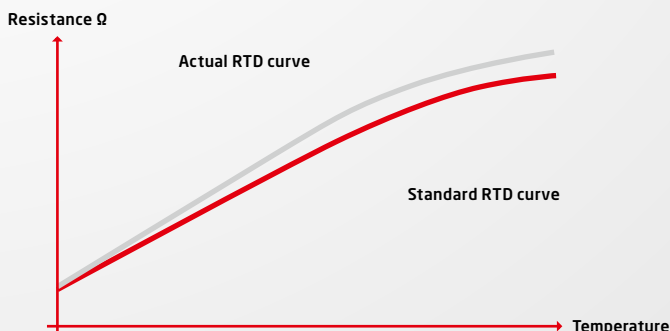

Callendar Van Dusen constants are specific to a certain RTD and are used to modify the standard RTD curve to more accurately reflect the actual curve of the device. This eliminates measurement errors and increases accuracy across the span.

HART 7 (HART 5)

The 5437 offers fully featured HART 7 capability with an option to select HART 5 mode for backward compatibility.

Signal dynamics

High resolution signal dynamics for maximum accuracy signal conversions.

Input: 24 bit

Output: 18 bit

Designed for the demands *of any installation*



Wiring

Innovative housing design means the PR 5437 can be wired from either the inside or the outside of the terminals.



1/4" center hole

Larger diameter center hole for easier installation over a wide range of probe mounting diameters.



Loop test pins




Introduction of accessible test pins allow measurement of loop current directly while maintaining loop integrity.





Status LED

Onboard LED indicates faults according to NAMUR NE44 and NE107.

	Constant green	OK
	Flashing red	Sensor / config error
	Constant red	System error




Write protect & transmitter safe state

Jumpers allow selection of write protection and transmitter safe state options.



PR 5437
Write protect



PR 5437
Safe state





Universal inputs

The PR 5437 supports the widest range of standardized input types and custom linearizations. Supported standards include IEC 60751, JIS C 1604-81 and GOST.

RTD 2-, 3- & 4-wire	Pt10...10000
	Ni10...10000
	Cu5...1000
Thermocouple	B, E, J, K, L, N, R, S, T, U, W3, W5, LR
Voltage	± 800 mV, -0.1 V...+1.7 V
Linear resistance	0 Ω...100 kΩ
Potentiometer 3-, 4- & 5-wire	10 Ω...100 kΩ

Easy configuration *of your devices*

A wide range of configuration methods are available including full support for both EDD and FDT / DTM technology for use with DCS / Asset Management Systems and supported management packages e.g. Pactware. Configuration can also be by handheld terminal or by PC via a Loop Link interface or HART modem.

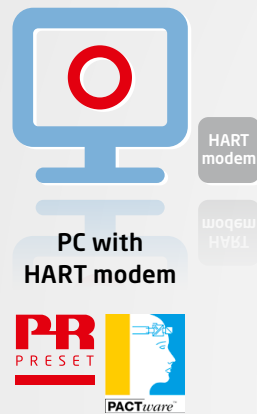

PR 5909 Loop Link is a dedicated communications interface for configuration and monitoring of PR electronics' PC-programmable devices using PReset software.

Private label *opportunity*

For relevant customers wishing to add additional value and product excellence to their portfolios, PR electronics offers the opportunity to have our products private labelled. This allows customers to benefit from PR electronics technical performance, while maintaining their own company identity on the products.

Various options exist such as the simple private label choices below:

Simple Private Label w/ approvals	Buyer's logo and product reference on product. Sellers name, address and approvals on product.
Simple Private Label wo/ approvals	Buyer's logo, product reference, name and address on product - no approvals supplied.

If this is of interest, please contact your local PR electronics sales office for more information.



PR 5437 Dual input, HART 7 / HART 5




PR 6437 Dual input, HART 7 / HART 5

Order form


Type	Version	Inputs		SIL approval		Marine approval	
5437	General purpose	: A	Single input (4 terminals)	: 1	SIL	: S	Yes : M
	Hazardous area	: D	Dual input (7 terminals)	: 2	No SIL	: -	No : -
6437	General purpose	: A	Single input (4 terminals)	: 1	SIL	: S	Yes : M
	Hazardous area	: D	Dual input (8 terminals)	: 2	No SIL	: -	No : -

**Type:****5331A**


2-wire programmable transmitter

**5333A**


2-wire programmable transmitter

**5334A**


2-wire programmable transmitter

**5335A / 5337A**

2-wire transmitter with HART protocol

**5437A**

2-wire HART 7 temperature transmitter

**Input:**

mV, measurement range / min. span	-12...+800 mV / 5 mV		-12...150 mV / 5 mV	-800...+800 mV / 2.5 mV	± 800 mV, -0.1 V...+1.7 V / 2.5 mV
RTD, measurement range / min. span	-200...+850°C / 25°C	-200...+850°C / 25°C		-200...+850°C / 10°C	-200...+850°C / 10°C
Lin. R, measurement range / min. span	0...5000 Ω / 30 Ω	0...10 kΩ / 30 Ω		0...7000 Ω / 25 Ω	0...100 kΩ / 25 Ω
Potentiometer					10...100 kΩ / 10%
Sensor connection, wires	2 - 3 - 4	2 - 3		2 - 3 - 4	2 - 3 - 4
TC types	BEJKNLRSTUW3W5Lr		BEJKNLRSTUW3W5Lr	BEJKNLRSTUW3W5	BEJKNLRSTUW3W5Lr
Max. offset	50% of selec. max. value	50% of selec. max. value	50% of selec. max. value	50% of selec. max. value	
Cold junction compensation	Internal / external		Internal	Internal / external	Internal / external

Output:

mA, signal range / min. span	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA
------------------------------	---------------------	---------------------	---------------------	---------------------	---------------------

Technical specifications:


Ambient temperature	-40°C...+85°C	-40°C...+85°C	-40°C...+85°C	-40°C...+85°C	-50°C...+85°C
Supply voltage, DC	7.2...35 VDC	8...35 VDC	7.2...35 VDC	8...35 VDC	7.5...48 VDC
Max. required power	0.8 W	0.8 W	0.8 W	0.8 W	< 850 mW
Isolation voltage, test / operation	1500 VAC / 50 V		1500 VAC / 50 V	1500 VAC / 50 V	2.5 kVAC / 55 VAC
Response time	1...60 s	0.33...60 s	1...60 s	1...60 s	75 ms
Signal dynamics, input / output	20 bit / 16 bit	19 bit / 16 bit	18 bit / 16 bit	22 bit / 16 bit	24 bit / 18 bit
Accuracy	≤ ±0.05% of span	≤ ±0.1% of span	≤ ±0.05% of span	≤ ±0.05% of span	≤ ±0.05% of span
Temperature coefficient	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.005% of span / °C	< ±0.005% of span / °C
NAMUR	NE21, NE43	NE43	NE21, NE43	NE21, NE43, NE89	NE21, NE43, NE44, NE89, NE95, NE107, NE130
Channels	1	1	1	1	1 / 1 or 2
Programming	5909	5909	5909	5909 / HART 5 / HART 7	5909 / HART 7 / HART 5

Approvals:



ATEX, Zone 2	✓	✓	✓	✓	✓
IECEx, Zone 2	✓	✓	✓	✓	✓
FM, Zone 2 - DIV 2					✓
CSA, Zone 2 - DIV 2				✓	✓
INMETRO	✓	✓	✓		✓
DNV	✓	✓	✓	✓	
EU-RO marine					✓
EAC	✓	✓	✓	✓	✓
NEPSI					✓
SIL 2/3 Full assessment					✓
SIL 2 Hardware assessment				✓	

Application guide:



RTD / TC / mV input	✓ / ✓ / ✓	✓ / - / -	- / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
Lin. R / potentiometer input	✓ / -	✓ / -		✓ / -	✓ / ✓
Dual input				4 terminals	
True dual input					7 terminals
Custom sensor linearisation	✓	✓	✓	✓	✓
mA output	✓	✓	✓	✓	✓
Loop-powered	✓	✓	✓	✓	✓
Galvanically isolated	✓		✓	✓	✓
HART protocol				✓	✓
Process signal calibration	✓	✓	✓	✓	✓





6331A
2-wire programmable transmitter




6333A
2-wire programmable transmitter




6334A
2-wire programmable transmitter




6335A / 6337A
2-wire HART transmitter



6437A
2-wire HART temperature transmitter



7501
Field mounted HART temperature transmitter




-12...+800 mV / 5 mV		-12...+150 mV / 5 mV	-800...+800 mV / -	± 800 mV, -0.1 V...+1.7 V / 2.5 mV	-800...+800 mV / 2.5 mV
-200...+850°C / 25°C	-200...+850°C / 25°C		-200...+850°C / 10°C	-200...+850°C / 10°C	-200...+850°C / 10°C
0...5000 Ω / 30 Ω	0...10 kΩ / 30 Ω		0...7000 Ω / 25 Ω	0...100 kΩ / 25 Ω	0...7000 Ω / 25 Ω
				10...100 kΩ / 10%	
2 - 3 - 4	2 - 3		2 - 3 - 4	2 - 3 - 4	2 - 3 - 4
BEJKNRSTUW3W5Lr		BEJKNRSTUW3W5Lr	BEJKNRSTUW3W5	BEJKNRSTUW3W5Lr	BEJKNRSTUW3W5
50% of selec. max. value	50% of selec. max. value	50% of selec. max. value	50% of selec. max. value		50% of selec. max. value
Internal / external		Internal	Internal / external	Internal / external	Internal / external
3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA
-40°C...+85°C	-40°C...+85°C	-40°C...+85°C	-40°C...+85°C	-50°C...+85°C	-40°C...+85°C
7.2...35 VDC	8...35 VDC	7.2...35 VDC	8...35 VDC	7.5...48 VDC	10 / 12...35 VDC
1-ch.: 0.8 W 2-ch.: 1.6 W	1-ch.: 0.8 W 2-ch.: 1.6 W	1-ch.: 0.8 W 2-ch.: 1.6 W	1-ch.: 0.8 W 2-ch.: 1.6 W	< 850 mW	
1500 VAC / 50 V		1500 VAC / 50 V	1500 VAC / 50 V	2.5 kVAC / 55 VAC	1500 VAC / 50 V
1...60 s	0.33...60 s	1...60 s	1...60 s	75 ms	1...60 s
20 bit / 16 bit	19 bit / 16 bit	18 bit / 16 bit	22 bit / 16 bit	24 bit / 18 bit	22 bit / 16 bit
≤ ±0.05% of span	≤ ±0.1% of span	≤ ±0.05% of span	≤ ±0.05% of span	≤ ±0.05% of span	≤ ±0.05% of span
< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.005% of span / °C	< ±0.005% of span / °C	< ±0.005% of span / °C
NE21, NE43	NE43	NE21, NE43	NE21, NE43, NE89	NE21, NE43, NE44, NE89, NE107	NE21, NE43
1 or 2	1 or 2	1 or 2	1 or 2	1 / 1 or 2	1
5909	5909	5909	5909 / HART 5 / HART 7	5909 / HART 7 / HART 5	LOI / HART

✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓
			✓	✓	
			✓	✓	
				✓	✓
				✓	
✓	✓	✓	✓	✓	✓
				✓	✓
			✓		✓


✓ / ✓ / ✓	✓ / - / -	- / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
✓ / -	✓ / -		✓ / -	✓ / ✓	✓ / -
			4 terminals		4 terminals
				8 terminals	
✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓
✓		✓	✓	✓	✓
✓	✓	✓	✓	✓	✓




5331D
2-wire programmable transmitter




5333D
2-wire programmable transmitter




5334B
2-wire programmable transmitter



5335D / 5337D
2-wire transmitter with HART protocol



5437D
2-wire HART 7 temperature transmitter



Type:

Input:

mV, measurement range / min. span	-12...+800 mV / 5 mV		-12...150 mV / 5 mV	-800...+800 mV / 2.5 mV	± 800 mV, -0.1 V...+1.7 V / 2.5 mV
RTD, measurement range / min. span	-200...+850°C / 25°C	-200...+850°C / 25°C		-200...+850°C / 10°C	-200...+850°C / 10°C
Lin. R, measurement range / min. span	0...5000 Ω / 30 Ω	0...10 kΩ / 30 Ω		0...7000 Ω / 25 Ω	0...100 kΩ / 25 Ω
Potentiometer					10...100 kΩ / 10%
Sensor connection, wires	2 - 3 - 4	2 - 3		2 - 3 - 4	2 - 3 - 4
TC types	BEJKNRSTUW3W5Lr		BEJKNRSTUW3W5Lr	BEJKNRSTUW3W5	BEJKNRSTUW3W5Lr
Max. offset	50% of selec. max. value	50% of selec. max. value	50% of selec. max. value	50% of selec. max. value	
Cold junction compensation	Internal / external		Internal	Internal / external	Internal / external

Output:

mA, signal range / min. span	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA
------------------------------	---------------------	---------------------	---------------------	---------------------	---------------------

Technical specifications:

Ambient temperature	-40°C...+85°C	-40°C...+85°C	-40°C...+85°C	-40...+85°C	-50°C...+85°C
Supply voltage, DC	7.2...30 VDC	8...30 VDC	7.2...30 VDC	8...30 VDC	7.5...30 VDC
Max. required power	0.7 W	0.7 W	0.7 W	0.7 W	< 850 mW
Isolation voltage, test / operation	1500 VAC / 50 V		1500 VAC / 50 V	1500 VAC / 50 V	2.5 kVAC / 42 VAC
Response time	1...60 s	0.33...60 s	1...60 s	1...60 s	75 ms
Signal dynamics, input / output	20 bit / 16 bit	19 bit / 16 bit	18 bit / 16 bit	22 bit / 16 bit	24 bit / 18 bit
Accuracy	≤ ±0.05% of span	≤ ±0.1% of span	≤ ±0.05% of span	≤ ±0.05% of span	≤ ±0.05% of span
Temperature coefficient	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.005% of span / °C	< ±0.005% of span / °C
NAMUR	NE21, NE43	NE43	NE21, NE43	NE21, NE43, NE89	NE21, NE43, NE44, NE89, NE95, NE107, NE130
Channels	1	1	1	1	1 / 1 or 2
Programming	5909	5909	5909	5909 / HART 5 / HART 7	5909 / HART 7 / HART 5

Approvals:


ATEX	✓	✓	✓	✓	✓
IECEx	✓	✓	✓	✓	✓
FM	✓	✓		✓	✓
CSA	✓	✓		✓	✓
INMETRO	✓	✓	✓	✓	✓
DNV	✓	✓	✓	✓	
EU-RO marine					✓
EAC Ex	✓	✓	✓	✓	✓
NEPSI					✓
SIL 2/3 Full assessment					✓
SIL 2 Hardware assessment				✓	

Application guide:


RTD / TC / mV input	✓ / ✓ / ✓	✓ / - / -	- / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
Lin. R / potentiometer input	✓ / -	✓ / -		✓ / -	✓ / ✓
Dual sensor				4 terminals	
True dual input					7 terminals
Custom sensor linearisation	✓	✓	✓	✓	✓
mA output	✓	✓	✓	✓	✓
Loop-powered	✓	✓	✓	✓	✓
Galvanically isolated	✓		✓	✓	✓
HART protocol				✓	✓
Process signal calibration	✓	✓	✓	✓	✓





6331D
2-wire programmable transmitter




6333D
2-wire programmable transmitter




6334B
2-wire programmable transmitter




6335D / 6337D
2-wire HART transmitter



6437D
2-wire HART temperature transmitter



7501
Field mounted HART temperature transmitter



-12...+800 mV / 5 mV		-12...+150 mV / 5 mV	-800...+800 mV / 2.5 mV	± 800 mV, -0.1 V...+1.7 V / 2.5 mV	-800...+800 mV / 2.5 mV
-200...+850°C / 25°C	-200...+850°C / 25°C		-200...+850°C / 10°C	-200...+850°C / 10°C	-200...+850°C / 10°C
0...5000 Ω / 30 Ω	0...10 kΩ / 30 Ω		0...7000 Ω / 25 Ω	0...100 kΩ / 25 Ω	0...7000 Ω / 25 Ω
				10...100 kΩ / 10%	
2 - 3 - 4	2 - 3		2 - 3 - 4	2 - 3 - 4	2 - 3 - 4
BEJKNRSTUW3W5Lr		BEJKNRSTUW3W5Lr	BEJKNRSTUW3W5	BEJKNRSTUW3W5Lr	BEJKNRSTUW3W5
50% of selec. max. value	50% of selec. max. value	50% of selec. max. value	50% of selec. max. value		50% of selec. max. value
Internal / external		Internal	Internal / external	Internal / external	Internal / external
3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA	3.5...23 mA / 16 mA
-40°C...+85°C	-40°C...+85°C	-40°C...+85°C	-40...+85°C	-50°C...+85°C	-40°C...+85°C
7.2...30 VDC	8...30 VDC	7.2...30 VDC	8...30 VDC	7.5...30 VDC	10 / 12...30 VDC
1-ch.: 0.7 W 2-ch.: 1.4 W	1-ch.: 0.7 W 2-ch.: 1.4 W	1-ch.: 0.7 W 2-ch.: 1.4 W	1-ch.: 0.7 W 2-ch.: 1.4 W	< 850 mW	
1500 VAC / 50 V		1500 VAC / 50 V	1500 VAC / 50 V	2.5 kVAC / 42 VAC	1500 VAC / 50 V
1...60 s	0.33...60 s	1...60 s	1...60 s	75 ms	1...60 s
20 bit / 16 bit	19 bit / 16 bit	18 bit / 16 bit	22 bit / 16 bit	24 bit / 18 bit	22 bit / 16 bit
≤ ±0.05% of span	≤ ±0.1% of span	≤ ±0.05% of span	≤ ±0.05% of span	≤ ±0.05% of span	≤ ±0.05% of span
< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.01% of span / °C	< ±0.005% of span / °C	< ±0.005% of span / °C	< ±0.005% of span / °C
NE21, NE43	NE43	NE21, NE43	NE21, NE43, NE89	NE21, NE43, NE44, NE89, NE107	NE21, NE43
1 or 2	1 or 2	1 or 2	1 or 2	1 / 1 or 2	1
5909	5909	5909	5909 / HART 5 / HART 7	5909 / HART 7 / HART 5	LOI / HART
✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓
✓	✓		✓	✓	✓
✓	✓		✓	✓	✓
				✓	✓
				✓	✓
✓	✓	✓	✓	✓	✓
				✓	✓
			✓		✓
✓ / ✓ / ✓	✓ / - / -	- / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
✓ / -	✓ / -		✓ / -	✓ / ✓	✓ / -
			4 terminals		4 terminals
				8 terminals	
✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓
✓		✓	✓	✓	✓
✓		✓	✓	✓	✓
✓	✓	✓	✓	✓	✓

**Benefit today from
PERFORMANCE MADE SMARTER**

PR electronics is the leading technology company that specializes in making industrial process control safer, more reliable and more efficient. Since 1974 we have been dedicated to perfecting our core competence of innovating high-precision technology with low power consumption. This dedication continues to set new standards for products that communicate, monitor and connect our customers' process measurement points to their process control systems.

Our innovative, patented technologies are derived from our extensive R&D facilities and our thorough understanding of our customers' needs and processes. We are guided by principles of simplicity, focus, courage and excellence, enabling some of the world's greatest companies to achieve PERFORMANCE MADE SMARTER.