

## Programmable f/I-f/f converter

### 5223B

- Pulse calculator / frequency generator
- Galvanic isolation
- ATEX I.S. version
- Analog current and voltage output
- PNP / NPN output, optional relays
- Universal supply



#### Advanced features

- The 5223 transmitter can be configured with a standard PC and the Loop Link communications unit, or delivered fully configured.


#### Application

- The f/I function performs frequency to current and voltage conversion.
- The f/f function can be used for pulse division or multiplication and as a buffer collecting fast pulse trains.
- A scale factor may be entered in all functions. Using both digital inputs, pulse addition or subtraction are possible.
- The frequency generator function is used as e.g. a time base or clock generator.
- Input and supply polarity reversal protection.
- Current and voltage output signals galvanically separated from the supply and the inputs.
- Programmable digital outputs including NPN, PNP or relay options.
- ATEX units have input for mechanical contact and NAMUR inductive proximity sensor.

#### Technical characteristics

- 5 front LEDs, indicating f1 and f2 active inputs (not NPN), Dig.out.1 and 2 active outputs, and a programmable error signal.
- Analog current output can be configured to any current within 0...20 mA range.
- Voltage output range is selectable between 0...10 VDC and 0...1 VDC by use of internal jumpers.
- Input range:  
Frequency: 0...20,000 Hz  
Sensor types: NAMUR, tacho, NPN, PNP, TTL, SO
- Output range:  
Current and voltage output: 0...20 mA / 0...10 V  
Relay outputs: 0...20 Hz  
NPN and PNP output as f/f: 0...1000 Hz  
NPN and PNP output as generator: 0...20,000 Hz

#### Applications

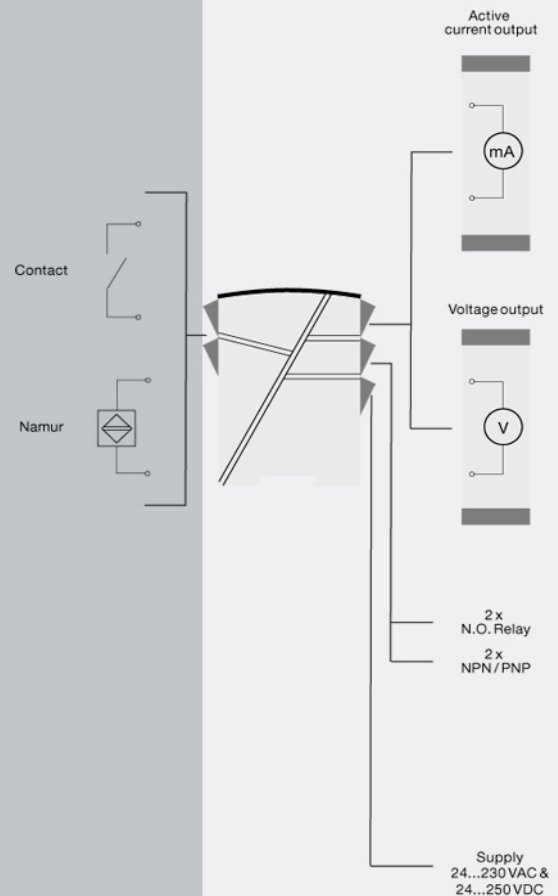

**Order:**

| Type  | Output                    |
|-------|---------------------------|
| 5223B | Analog + NPN / PNP : 1    |
|       | Analog + relay output : 2 |

**Environmental Conditions**

|                              |                      |
|------------------------------|----------------------|
| Operating temperature.....   | -20°C to +60°C       |
| Calibration temperature..... | 20...28°C            |
| Relative humidity.....       | < 95% RH (non-cond.) |
| Protection degree.....       | IP20                 |

**Mechanical specifications**

|                            |                                       |
|----------------------------|---------------------------------------|
| Dimensions (HxWxD).....    | 109 x 23.5 x 130 mm                   |
| Weight approx.....         | 240 g                                 |
| DIN rail type.....         | DIN 46277                             |
| Wire size.....             | 1 x 2.5 mm <sup>2</sup> stranded wire |
| Screw terminal torque..... | 0.5 Nm                                |

**Common specifications****Supply**

|                                 |   |
|---------------------------------|---|
| Supply voltage, universal.....  | 21.6...253 VAC, 50...60 Hz or<br>19.2...300 VDC |
| Fuse.....                       | 400 mA SB / 250 VAC                             |
| Max. required power.....        | 3.5 W   |
| Internal power dissipation..... | 3 W   |

**Isolation voltage**

|   |                         |
|---|-------------------------|
| Isolation voltage, test /<br>working..... | 3.75 kVAC / 250 VAC     |
| PELV/SELV.....                            | IEC 61140               |
| Power-up delay.....                       | 0...999 s               |
| Warm-up time.....                         | 1 min.                  |
| Programming.....                          | Loop Link               |
| Signal / noise ratio.....                 | Min. 60 dB              |
| Response time, analog.....                | < 60 ms + period        |
| Response time, digital output.....        | < 50 ms + period        |
| Effect of supply voltage change.....      | < 0.005% of span / VDC  |
| Temperature coefficient.....              | < ±0.01% of span / °C   |
| Linearity error.....                      | < 0.1% of span          |
| NAMUR supply I.S. / Ex.....               | 8.9 VDC ±0.5 VDC / 8 mA |
| EMC immunity influence.....               | < ±0.5%                 |

**Input specifications****Common input specifications**

|                             |                                   |
|-----------------------------|-----------------------------------|
| Max. offset.....            | 90% of selected max.<br>frequency |
| Measurement range.....      | 0...20 kHz                        |
| Min. measurement range..... | 0.001 Hz                          |
| Min. pulse length.....      | 25 µs                             |
| Input types.....            | NAMUR acc. to DIN 19234           |

**Output specifications****Common output specifications**

|                    |       |
|--------------------|-------|
| Updating time..... | 20 ms |
|--------------------|-------|

**Current output**

|                              |                         |
|------------------------------|-------------------------|
| Signal range.....            | 0...20 mA               |
| Min. signal range.....       | 5 mA                    |
| Load (@ current output)..... | ≤ 600 Ω                 |
| Load stability.....          | ≤ 0.01% of span / 100 Ω |
| Current limit.....           | < 23 mA                 |

**Voltage output**

|                              |            |
|------------------------------|------------|
| Signal range.....            | 0...10 VDC |
| Min. signal range.....       | 250 mV     |
| Load (@ voltage output)..... | ≥ 500 kΩ   |

**Relay output**

|                               |                             |
|-------------------------------|-----------------------------|
| Max. switching frequency..... | 20 Hz                       |
| Max. voltage.....             | 250 VRMS                    |
| Max. current.....             | 2 AAC                       |
| Max. AC power.....            | 100 VA (I.S. version 5223B) |
| Max. load at 24 VDC.....      | 1 A                         |

|                         |                                      |
|-------------------------|--------------------------------------|
| Other output types..... | Active outputs (NPN / PNP)           |
| Other output types..... | f/f converter output                 |
| Other output types..... | Frequency generator                  |
| of span.....            | = of the presently selected<br>range |

**Observed authority requirements**

|          |                |
|----------|----------------|
| EMC..... | 2014/30/EU     |
| LVD..... | 2014/35/EU     |
| EAC..... | TR-CU 020/2011 |

**Approvals**

|             |                      |
|-------------|----------------------|
| ATEX.....   | KEMA 04ATEX1001      |
| EAC Ex..... | RU C-DK.GB08.V.00410 |