
PERFORMANCE MADE SMARTER

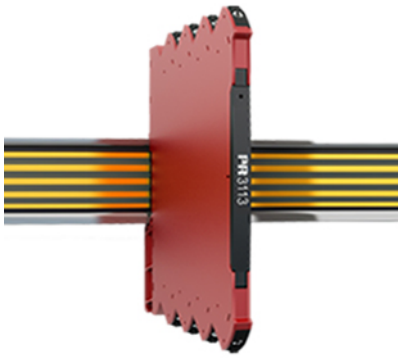

HART 7 temperature converter - isolated

3113

- Excellent accuracy, better than 0.05% of span
- Excellent EMC performance
- Selectable 60 ms / 60 s response time
- Pre-calibrated temperature ranges selectable via DIP switches
- Slimline 6.1 mm housing


Functional highlights
- Temperature converter which measures a standard Pt100, TC J and K temperature sensor, and provides an isolated active analog current and HART signal output.
- High 3-port isolation provides surge suppression that protects the control system from transients and noise and eliminates ground loops.
- All terminals are over-voltage protected, polarity protected and short-circuit protected.
- The device can be mounted in Safe area or in Zone 2 / Division 2 areas and is approved for marine applications.

Technical highlights
- Flexible 24 VDC (±30%) supply via power rail or connectors.
- Excellent conversion accuracy in all available ranges, better than 0.05% of span.
- Selectable internal / external CJC.
- 60 ms fast response time with simultaneous sensor error detection when selected.
- Meeting the NAMUR NE21 recommendations, this device ensures top measurement performance in harsh EMC environments.
- The device meets the NAMUR NE43 standard defining out of range and sensor error output values.
- Excellent signal / noise ratio > 60 dB.
- High galvanic isolation of 2.5 kVAC.
- A green front LED indicates normal operation, status of the input sensor and malfunction.
- Wide ambient temperature range: -25...+70°C.

Programming
- Selectable DIP-mode for easy configuration of more than 1000 factory calibrated measurement ranges with HART read only feature.
- Selectable HART mode with HART 7 revision protocol enables extended device programming.
- Selectable HART-mode to enable full HART read-write capability.

Mounting / installation
- The narrow 6.1 mm housing allows up to 163 units per meter.
- Units can be mounted side by side, horizontally and vertically, without air gap on a standard DIN rail, even at 70°C ambient temperature.
- Units can be supplied separately or installed on PR 9400 power rail.

Applications

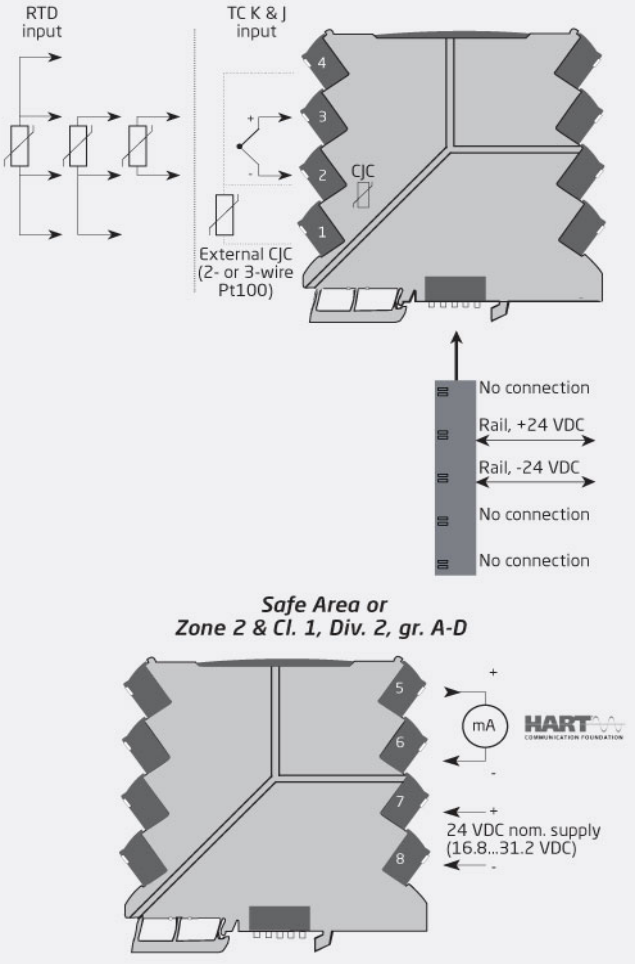

This page is automatically generated on the basis of information provided on www.prelectronics.com and affiliated websites. It is provided to you as a service and for information purpose only. While we have attempted to maintain the information as accurately as possible, the page may contain errors or omissions for which we disclaim any and all liability

Order

Type	Version	
3113	With power rail connector / terminals	:-
	Supplied via terminals	:-N

Example: 3113-N

Environmental Conditions

Operating temperature	-25°C to +70°C
Storage temperature	-40°C to +85°C
Calibration temperature	20...28°C
Relative humidity	< 95% RH (non-cond.)
Protection degree	IP20
Installation in	Pollution degree 2 & meas. / overvoltage cat. II

Mechanical specifications

Dimensions (HxWxD)	113 x 6.1 x 115 mm
Weight approx.	70 g
DIN rail type	DIN EN 60715/35 mm
Wire size	0.13...2.5 mm^2 / AWG 26...12 stranded wire
Screw terminal torque	0.5 Nm
Vibration	IEC 60068-2-6
2...25 Hz	±1.6 mm
25...100 Hz	±4 g

Common specifications

Supply

Supply voltage	16.8...31.2 VDC
Max. required power	0.70 W
Max. power dissipation	0.70 W

Isolation voltage

Isolation voltage, test / working	2.5 kVAC / 300 VAC (reinforced)
Zone 2 / Div. 2	250 VAC

Response time

HART mode, (0...90%, 100...10%)	60 ms...60 s, programmable
DIP mode, (0...90%, 100...10%)	< 60 ms
Accuracy	Better than 0.05% of selected range
Signal / noise ratio	Min. 60 dB
Long-term stability, better than	±0.1% of span / year (±0.3% of span / 5 years)
Programming	DIP switches
Signal dynamics, input	23 bit
Signal dynamics, output	18 bit
EMC immunity influence	< ±0.5% of span
Extended EMC immunity: NAMUR NE21, A criterion, burst	< ±1% of span
Incorrect DIP-switch setting identification	3.5 mA output; LED 0.5 s / 1 Hz

Input specifications

RTD input

Temperature range, Pt100	-200...+850°C
Min. measurement range (span)	10°C
Accuracy: the greater of	Better than 0.05% of span or 0.1°C
Temperature coefficient: the greater of	0.02°C/°C or ≤ ±0.01%/°C
Sensor current	< 150 µA
Sensor cable resistance	< 50 Ω per wire
Effect of sensor cable resistance (3-/4-wire)	< 0.002 Ω / Ω
Sensor error detection	Yes - selectable via DIP-switch
Broken sensor detection	> 800 Ω
Shorted sensor detection	< 18 Ω

TC input

Temperature range, TC J	-100...+1200°C
Temperature range, TC K	-180...+1372°C
Min. measurement range (span) - TC J & K	50°C
Accuracy: the greater of	Better than 0.05% of span or 0.5°C
Temperature coefficient: the greater of	0.1°C/°C or ≤ ±0.01%/°C
Sensor cable resistance	< 5 kΩ per wire
Cold junction compensation (CJC): Accuracy @ external Pt100 input	Better than ±0.15°C
Cold junction compensation (CJC): Accuracy @ internal CJC	Better than ±2.5°C
Internal CJC error detection	Yes
External CJC error detection	Yes - selectable via DIP-switch
Open Thermocouple detection	Yes - selectable via DIP-switch

Output specifications

Common output specifications

Updating time	10 ms

Current output

Signal range	0...23 mA
Programmable signal ranges	4...20 and 20...4 mA
Load (@ current output)	≤ 600 Ω
Load stability	≤ 0.01% of span / 100 Ω
Sensor error indication	3.5 mA or 23 mA / acc. to NAMUR NE43 or OFF
Open output	< 20 V
HART protocol revisions	HART 7

I.S. / Ex marking

ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc
FM, US	Cl. I, Div. 2, Gp. A, B, C, D T4 or Cl. I, Zone 2, AEx nA IIC T4
FM, CA	Cl. I, Div. 2, Gp. A, B, C, D T4 or Cl. I, Zone 2, Ex nA IIC T4
EAC Ex	2Ex nA IIC T4 Gc X

Observed authority requirements

EMC	2014/30/EU & UK SI 2016/1091
LVD	2014/35/EU & UK SI 2016/1101
ATEX	2014/34/EU & UK SI 2016/1107
RoHS	2011/65/EU & UK SI 2012/3032
EAC	TR-CU 020/2011
EAC Ex	TR-CU 012/2011

Approvals

ATEX	KEMA 10ATEX0147 X
IECEx	KEM 10.0068X
UKEX	DEKRA 21UKEX0055X
c FM us	FM17US0004X / FM17CA0003X
c UL us, UL 61010-1	E314307
EAC Ex	EAEU KZ 7500361.01.01.08756
DNV Marine	TAA00001RW