PERFORMANCE MADE SMARTER



2-wire programmable transmitter

5334A


– TC input
– High measurement accuracy
– Galvanic isolation
– Programmable sensor error value
– For DIN form B sensor head mounting

Application
- Linearized temperature measurement with TC sensor.
- Amplification of bipolar mV signals to a 4...20 mA signal, optionally linearized according to a defined linearization function.

Technical characteristics
- Within a few seconds the user can program PR5334A to measure temperatures within all TC ranges defined by the norms.
- Cold junction compensation (CJC) with a built-in temperature sensor.
- Continuous check of vital stored data for safety reasons.

Mounting / installation
- For DIN form B sensor head or DIN rail mounting with the PR fitting type 8421.

Applications

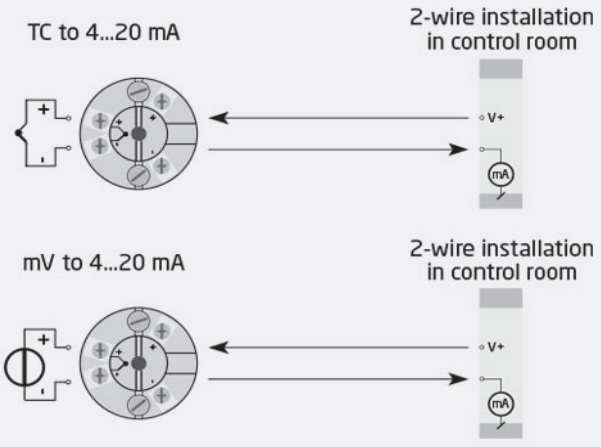

This page is automatically generated on the basis of information provided on www.prelectronics.com and affiliated websites. It is provided to you as a service and for information purpose only. While we have attempted to maintain the information as accurately as possible, the page may contain errors or omissions for which we disclaim any and all liability

Order

Type	Version	Ambient temperature	Galvanic isolation
5334	Zone 2 : A	-40°C...+85°C : 3	1500 VAC : B

Environmental Conditions

Operating temperature	-40°C to +85°C
Calibration temperature	20...28°C
Relative humidity	< 95% RH (non-cond.)
Protection degree (encl./terminal)	IP68 / IP00

Mechanical specifications

Dimensions	Ø 44 x 20.2 mm
Weight approx	50 g
Wire size	1 x 1.5 mm^2 stranded wire
Screw terminal torque	0.4 Nm
Vibration	IEC 60068-2-6
2...25 Hz	±1.6 mm
25...100 Hz	±4 g

Common specifications

Supply

Supply voltage	7.2...35 VDC
Internal power dissipation	25 mW…0.8 W

Isolation voltage

Isolation voltage, test / working	1.5 kVAC / 50 VAC

Response time

Response time (programmable)	1...60 s
Voltage drop	7.2 VDC
Warm-up time	5 min.
Power on to stable output	4.5 s
Programming	PR 5909 Loop Link communications interface
Signal / noise ratio	Min. 60 dB
EEprom error check	< 3.5 s
Accuracy	Better than 0.05% of selected range
Signal dynamics, input	18 bit
Signal dynamics, output	16 bit
Effect of supply voltage change	< 0.005% of span / VDC
EMC immunity influence	< ±0.5% of span
Extended EMC immunity: NAMUR NE21, A criterion, burst	< ±1% of span

Input specifications

Common input specifications

Max. offset	50% of selected max. value

TC input

Thermocouple type	B, E, J, K, L, N, R, S, T, U, W3, W5, LR
Cold junction compensation (CJC)	< ±1.0°C
Sensor error detection	Yes
Sensor error current: When detecting / else	Nom. 33 µA / 0 µA

Voltage input

Measurement range	-12...150 mV
Min. measurement range (span)	5 mV
Input resistance	10 MΩ (1)

Output specifications

Current output

Signal range	4…20 mA
Min. signal range	16 mA
Load (@ current output)	≤ (Vsupply - 7.2) / 0.023 [Ω]
Load stability	≤ 0.01% of span / 100 Ω (1)
Sensor error indication	Programmable 3.5…23 mA
NAMUR NE43 Upscale/Downscale	23 mA / 3.5 mA

Common output specifications

Updating time	440 ms
of span	= of the presently selected range

I.S. / Ex marking

ATEX	II 3 G Ex nA [ic] IIC T6...T4 Gc, II 3 G Ex ec [ic] IIC T6...T4 Gc, II 3 G Ex ic IIC T6...T4 Gc, II 3 D Ex ic IIIC Dc
IECEx	Ex nA [ic] IIC T6…T4 Gc, Ex ec [ic] IIC T6…T4 Gc, Ex ic IIC T6…T4 Gc, Ex ic IIIC Dc
INMETRO	Ex ec [ic] IIC T6...T4 Gc, Ex ic IIC T6...T4 Gc, Ex ic IIIC Dc

Observed authority requirements

EMC	2014/30/EU
ATEX	2014/34/EU
RoHS	2011/65/EU
EAC	TR-CU 020/2011
EAC Ex	TR-CU 012/2011

Approvals

ATEX	DEKRA 20ATEX0096X
IECEx	DEK 20.0059X
INMETRO	DEKRA 23.0009X
EAC Ex	EAEU KZ 7500361.01.01.08756
DNV Marine	TAA0000101