


## 2-wire programmable transmitter



### 6333B

- RTD or Ohm input
- High measurement accuracy
- 3-wire connection
- Can be installed in Ex zone 0
- 1- or 2-channel version

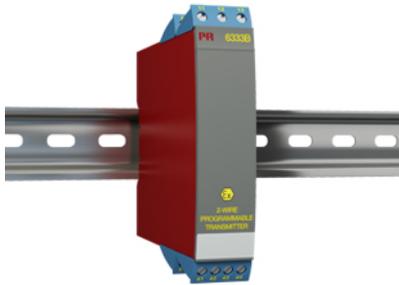

#### Application

- Linearized temperature measurement with Pt100...Pt1000 or Ni100...Ni1000 sensor.
- Conversion of linear resistance variation to a standard analog current signal, for instance from valves or Ohmic level sensors.

#### Technical characteristics


- Within a few seconds the user can program PR6333B to measure temperatures within all RTD ranges defined by the norms.
- The RTD and resistance inputs have cable compensation for 3-wire connection.
- A limit can be programmed on the output signal.

#### Mounting / installation

- Mounted vertically or horizontally on a DIN rail. Using the 2-channel version, up to 84 channels can be mounted per meter.
- The 6333B can be mounted in zone 0, 1, 2 and zone 21, 22 including M1 / Class I, Division 1, Groups A, B, C, D.

#### Applications


RTD to 4...20 mA



2-wire installation in control room



Resistance to 4...20 mA



2-wire installation in control room



## Order

Type	Version	Galvanic isolation	Channels
6333	Zone 0, 1, 2, Z1, Z2, M1 / DIV. 1, DIV. 2 : B	None : 1	Single : A Double : B

### Environmental Conditions

Operating temperature.....	-40°C to +85°C
Storage temperature.....	-40°C to +85°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20

### Mechanical specifications

Dimensions (HxWxD).....	109 x 23.5 x 104 mm
Weight (1 / 2 channels).....	145 / 185 g
DIN rail type.....	DIN EN 60715/35 mm
Wire size.....	0.13...2.08 mm <sup>2</sup> AWG 26...14 stranded wire
Screw terminal torque.....	0.5 Nm

### Common specifications

#### Supply

Supply voltage.....	8.0...30 VDC
Max. required power.....	≤ 0.8 W/≤ 1.6 W (1 ch./2 ch.)
Internal power dissipation.....	0.19...0.8 W

#### Response time

Response time (programmable).....	0.33...60 s
Voltage drop.....	8.0 VDC
Warm-up time.....	5 min.
Programming.....	PR 5909 Loop Link communications interface
Signal / noise ratio.....	Min. 60 dB
Accuracy.....	Better than 0.1% of sel. range
Signal dynamics, input.....	19 bit
Signal dynamics, output.....	16 bit
Effect of supply voltage change.....	< 0.005% of span / VDC

### Input specifications

#### Common input specifications

Max. offset.....	50% of selected max. value
------------------	----------------------------

#### RTD input

RTD type.....	Pt100, Ni100, lin. R
Cable resistance per wire.....	10 Ω (max.)
Sensor current.....	> 0.2 mA, < 0.4 mA
Effect of sensor cable resistance (3-wire).....	< 0.002 Ω / Ω
Sensor error detection.....	Yes

#### Linear resistance input

Linear resistance min....max.....	0 Ω...10000 Ω
-----------------------------------	---------------

### Output specifications

#### Current output

Signal range.....	4...20 mA
Min. signal range.....	16 mA
Load (@ current output).....	≤ (Vsupply - 8) / 0.023 [Ω]
Load stability.....	≤ 0.01% of span / 100 Ω
Sensor error indication.....	Programmable 3.5...23 mA
NAMUR NE43 Upscale/Downscale.....	23 mA / 3.5 mA

#### Common output specifications

Updating time.....	135 ms
of span.....	= of the presently selected range

### Observed authority requirements

EMC.....	2014/30/EU
ATEX.....	2014/34/EU
RoHS.....	2011/65/EU
EAC.....	TR-CU 020/2011
EAC Ex.....	TR-CU 012/2011

### Approvals

ATEX.....	DEKRA 20ATEX0105X
IECEx.....	DEK 20.0062X
FM.....	FM17US0013X
CSA.....	1125003
INMETRO.....	DEKRA 23.0010X
EAC Ex.....	EAEU KZ 7500361.01.01.08756