

## 2-wire HART transmitter

### 6335A

- RTD, TC, Ohm, or mV input
- Extremely high measurement accuracy
- HART 5 protocol
- Galvanic isolation
- 1- or 2-channel version



#### Application

- Linearized temperature measurement with Pt100...Pt1000, Ni100...Ni1000, or TC sensor.
- Difference or average temperature measurement of 2 resistance or TC sensors.
- Conversion of linear resistance variation to a standard analog current signal, for instance from valves or Ohmic level sensors.
- Amplification of a bipolar mV signal to a standard 4...20 mA current signal.
- Connection of up to 15 channels to a digital 2-wire signal with HART communication.


#### Technical characteristics

- Within a few seconds the user can program PR6335A to measure temperatures within all ranges defined by the norms.
- The RTD and resistance inputs have cable compensation for 2-, 3- and 4-wire connection.
- The 6335A provides the required failure data (SFF and PFDAVG) for SIL applications as per IEC 61508 / IEC 61511.
- A limit can be programmed on the output signal.
- Continuous check of vital stored data for safety reasons.
- Sensor error detection according to the guidelines in NAMUR NE89.

#### Mounting / installation

- Mounted vertically or horizontally on a DIN rail. Using the 2-channel version up to 84 channels per metre can be mounted.
- Configuration via standard HART communication interfaces or by PR 5909 Loop Link.
- The 6335A can be mounted in zone 2, 22 / Class I, Division 2, Groups A, B, C, D.

#### Applications

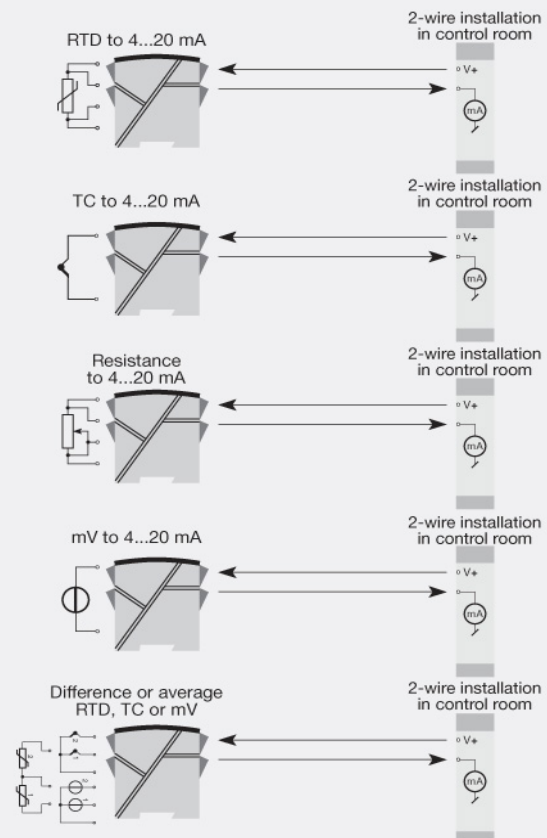

## Order

Type	Version	Galvanic isolation	Channels
6335	Zone 2, 22 / Div. 2 : A	1500 VAC : 2	Single : A Double : B

NB! Please remember to order CJC connectors type 5910 (channel 1) and 5913 (channel 2) for TC inputs with an internal CJC.

## Environmental Conditions

Operating temperature.....	-40°C to +85°C
Storage temperature.....	-40°C to +85°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20

## Mechanical specifications

Dimensions (HxWxD).....	109 x 23.5 x 104 mm
Weight (1 / 2 channels).....	145 / 185 g
DIN rail type.....	DIN EN 60715/35 mm
Wire size.....	0.13...2.08 mm <sup>2</sup> AWG 26...14 stranded wire
Screw terminal torque.....	0.5 Nm

## Common specifications

### Supply

Supply voltage.....	8.0...35 VDC
Internal power dissipation, 1 / 2 ch.....	19 mW...0.8 / 1.6 W

### Isolation voltage

Isolation voltage, test / working.....	1.5 kVAC / 50 VAC
---	-------------------

### Response time

Response time (programmable).....	1...60 s
Voltage drop.....	8.0 VDC
Warm-up time.....	30 s
Programming.....	HART & PR 5909 Loop Link communications interface
Signal / noise ratio.....	Min. 60 dB
Accuracy.....	Better than 0.05% of selected range
Signal dynamics, input.....	22 bit
Signal dynamics, output.....	16 bit
Effect of supply voltage change.....	< 0.005% of span / VDC
EMC immunity influence.....	< ±0.1% of span
Extended EMC immunity: NAMUR NE21, A criterion, burst.....	< ±1% of span

## Input specifications

### Common input specifications

Max. offset.....	50% of selected max. value
------------------	----------------------------

### RTD input

RTD type.....	Pt100...1000, Ni100...1000, lin. R
---------------	------------------------------------

Cable resistance per wire.....	5 Ω (up to 50 Ω per wire is possible with reduced measurement accuracy)
--------------------------------	---

Sensor current.....	Nom. 0.2 mA
---------------------	-------------

Effect of sensor cable resistance (3-/4-wire).....	< 0.002 Ω / Ω
---	---------------

Sensor error detection.....	Yes
-----------------------------	-----

### Linear resistance input

Linear resistance min...max.....	0 Ω...7000 Ω
----------------------------------	--------------

### TC input

Thermocouple type.....	B, E, J, K, L, N, R, S, T, U, W3, W5
------------------------	--------------------------------------

Cold junction compensation (CJC).....	< ±1.0°C
--	----------

Sensor error detection.....	Yes
-----------------------------	-----

Sensor error current: When detecting / else.....	Nom. 33 µA / 0 µA
---	-------------------

### Voltage input

Measurement range.....	-800...+800 mV
------------------------	----------------

Min. measurement range (span).....	2.5 mV
------------------------------------	--------

Input resistance.....	10 MΩ
-----------------------	-------

## Output specifications

### Current output

Signal range.....	4...20 mA
-------------------	-----------

Min. signal range.....	16 mA
------------------------	-------

Load (@ current output).....	≤ (Vsupply - 8) / 0.023 [Ω]
------------------------------	-----------------------------

Load stability.....	≤ 0.01% of span / 100 Ω
---------------------	-------------------------

Sensor error indication.....	Programmable 3.5...23 mA
------------------------------	--------------------------

NAMUR NE43 Upscale/Downscale.....	23 mA / 3.5 mA
-----------------------------------	----------------

### Common output specifications

Updating time.....	440 ms
--------------------	--------

of span.....	= of the presently selected range
--------------	-----------------------------------

## Observed authority requirements

EMC.....	2014/30/EU & UK SI 2016/1091
----------	------------------------------

ATEX.....	2014/34/EU & UK SI 2016/1107
-----------	------------------------------

RoHS.....	2011/65/EU & UK SI 2012/3032
-----------	------------------------------

EAC.....	TR-CU 020/2011
----------	----------------

EAC Ex.....	TR-CU 012/2011
-------------	----------------

## Approvals

ATEX.....	DEKRA 20ATEX0109X
-----------	-------------------

IECEX.....	DEK 20.0063X
------------	--------------

CSA.....	1125003
----------	---------

INMETRO.....	DEKRA 23.0011X
--------------	----------------

EAC Ex.....	EAEU KZ 7500361.01.01.08756
-------------	-----------------------------

SIL.....	Hardware assessed for use in SIL applications
----------	---