


2-wire HART transmitter



6337A

- 1- or 2-channel converter for RTD, TC, Ohm, and bipolar mV signals
- 2 analogue inputs and 5 device variables with status available
- HART protocol revision selectable from HART 5 or HART 7
- Hardware assessed for use in SIL applications
- Mounting on a DIN rail in Safe Area or Zone 2/22

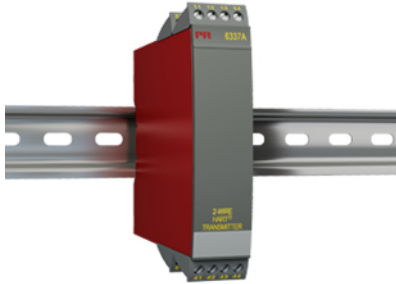

Application

- Linearized temperature measurement with TC and RTD sensors e.g. Pt100 and Ni100.
- HART communication and 4...20 mA analog PV output for individual, difference or average temperature measurement of up to two RTD or TC input sensors.
- Conversion of linear resistance to a standard analog current signal, e.g from valves or Ohmic level sensors.
- Amplification of bipolar mV signals to standard 4...20 mA current signals.
- Up to 63 transmitters (HART 7) can be connected in a multidrop communication setup.


Technical characteristics

- HART protocol revision can be changed by user configuration to either HART 5 or HART 7 protocol.
- The HART 7 protocol offers:
 - Long Tag numbers of up to 32 characters.
 - Enhanced Burst Mode and Event notification with time stamping.
 - Device variable and status mapping to any dynamic variable PV, SV, TV or QV.
 - Process signal trend measurement with logs and summary data.
 - Automatic event notification with time stamps.
 - Command aggregation for higher communication efficiency.
- 6337A provides the required failure data (SFF and PFDAVG) for SIL applications as per IEC 61508 / IEC 61511.
- Continuous check of vital stored data.
- Meeting the NAMUR NE21 recommendations, the 6337A HART transmitter ensures top measurement performance in harsh EMC environments. Additionally, the 6337A meets NAMUR NE43 and NE89 recommendations.

Mounting / installation

- DIN rail mounting with up to 84 channels per meter.
- Configuration via standard HART communication interfaces or by PR 5909 Loop Link.
- The 6337A can be mounted in zone 2, 22 / Class I, Division 2, Groups A, B, C, D.

Applications

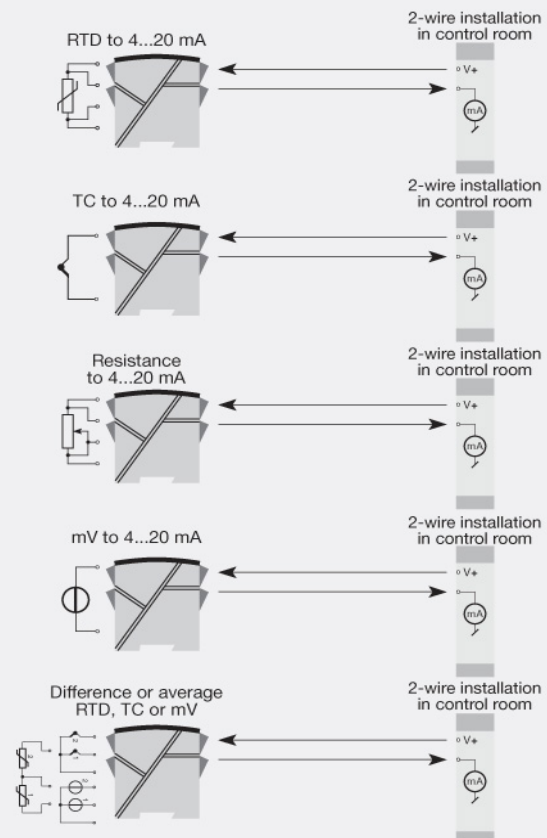

Order

Type	Version	Galvanic isolation	Channels
6337	Zone 2, 22 / Div. 2 : A	1500 VAC : 2	Single : A Double : B

NB! Please remember to order CJC connectors type 5910 (channel 1) and 5913 (channel 2) for TC inputs with an internal CJC.

Environmental Conditions

Operating temperature.....	-40°C to +85°C
Storage temperature.....	-40°C to +85°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20

Mechanical specifications

Dimensions (HxWxD).....	109 x 23.5 x 104 mm
Weight (1 / 2 channels).....	150 / 200 g
DIN rail type.....	DIN EN 60715/35 mm
Wire size.....	0.13...2.08 mm ² AWG 26...14 stranded wire
Screw terminal torque.....	0.5 Nm

Common specifications

Supply

Supply voltage.....	8.0...35 VDC
Internal power dissipation, 1 / 2 ch.....	19 mW...0.8 / 1.6 W

Isolation voltage

Isolation voltage, test / working.....	1.5 kVAC / 50 VAC
---	-------------------

Response time

Response time (programmable).....	1...60 s
Voltage drop.....	8.0 VDC
Signal dynamics, input.....	22 bit
Signal dynamics, output.....	16 bit
Signal / noise ratio.....	> 60 dB
Accuracy.....	Better than 0.05% of selected range
EMC immunity influence.....	< ±0.1% of span
Extended EMC immunity: NAMUR NE21, A criterion, burst.....	< ±1% of span

Input specifications

Common input specifications

Max. offset.....	50% of selected max. value
------------------	----------------------------

RTD input

RTD type.....	Pt50/100/200/500/1000; Ni50/100/120/1000
---------------	---

Cable resistance per wire.....	5 Ω (up to 50 Ω per wire is possible with reduced measurement accuracy)
--------------------------------	---

Sensor current.....	Nom. 0.2 mA
---------------------	-------------

Effect of sensor cable resistance (3-/4-wire).....	< 0.002 Ω / Ω
---	---------------

Linear resistance input

Linear resistance min...max.....	0 Ω...7000 Ω
----------------------------------	--------------

TC input

Thermocouple type.....	B, E, J, K, L, N, R, S, T, U, W3, W5
------------------------	--------------------------------------

Cold junction compensation (CJC).....	Constant, internal or external via a Pt100 or Ni100 sensor
--	--

Voltage input

Measurement range.....	-800...+800 mV
------------------------	----------------

Min. measurement range (span).....	2.5 mV
------------------------------------	--------

Input resistance.....	10 MΩ
-----------------------	-------

Output specifications

Current output

Signal range.....	4...20 mA
-------------------	-----------

Min. signal range.....	16 mA
------------------------	-------

Load (@ current output).....	≤ (Vsupply - 8) / 0.023 [Ω]
------------------------------	-----------------------------

Sensor error indication.....	Programmable 3.5...23 mA
------------------------------	--------------------------

NAMUR NE43 Upscale/Downscale.....	23 mA / 3.5 mA
-----------------------------------	----------------

Common output specifications

Updating time.....	440 ms
--------------------	--------

HART protocol revisions.....	HART 7 and HART 5
------------------------------	-------------------

Observed authority requirements

EMC.....	2014/30/EU & UK SI 2016/1091
----------	------------------------------

ATEX.....	2014/34/EU & UK SI 2016/1107
-----------	------------------------------

RoHS.....	2011/65/EU & UK SI 2012/3032
-----------	------------------------------

EAC.....	TR-CU 020/2011
----------	----------------

EAC Ex.....	TR-CU 012/2011
-------------	----------------

Approvals

ATEX.....	DEKRA 20ATEX0109X
-----------	-------------------

IECEX.....	DEK 20.0063X
------------	--------------

CSA.....	1125003
----------	---------

INMETRO.....	DEKRA 23.0011X
--------------	----------------

EAC Ex.....	EAEU KZ 7500361.01.01.08756
-------------	-----------------------------

SIL.....	Hardware assessed for use in SIL applications
----------	---