

Bipolar isolated converter

3117

- Conversion of voltage and current bipolar process signals to unipolar signals
- Output: Current and voltage
- Excellent accuracy, better than 0.05 % of span
- Fast response time < 7 ms and high output load stability
- Multiple signal ranges are selectable via DIP-switches



Functional highlights

- Isolating converter which can be used for signal conversion of standard bipolar analog process signals into a unipolar analog signal.
- High 3-port isolation provides surge suppression that protects the control system from transients and noise and eliminates ground loops.
- All terminals are over-voltage protected, polarity protected and short-circuit protected.
- The device can be mounted in Safe area or in Zone 2 / Division 2 areas and is approved for marine applications.

Technical highlights

- Flexible 24 VDC ($\pm 30\%$) supply via power rail or connectors.
- Excellent conversion accuracy in all available ranges, better than 0.05% of span.
- Fast response time < 7 ms / > 100 Hz bandwidth — 10 Hz bandwidth damping possible via DIP switch.
- Meeting the NAMUR NE21 recommendations, this device ensures top measurement performance in harsh EMC environments.
- Excellent signal/noise ratio > 60 dB.
- High galvanic isolation of 2.5 kVAC.
- Inputs and outputs are floating and galvanically separated.
- A green front LED indicates normal operation and malfunction.
- Wide ambient temperature range: $-25...+70^{\circ}\text{C}$.


Programming

- Fast and easy configuration of factory-calibrated measurement ranges via DIP switches.

Mounting / installation

- The narrow 6.1 mm housing allows up to 163 units per meter.
- Units can be mounted side by side, horizontally and vertically, without air gap on a standard DIN rail, even at 70°C ambient temperature.
- Units can be supplied separately or installed on PR 9400 power rail.

Applications

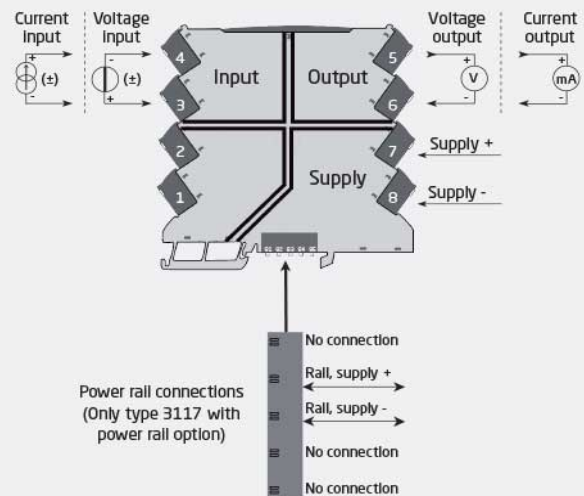

Safe Area or
Zone 2 & Cl. 1, Div. 2, gr. A-D

Order

Type	Version
3117	With power rail connector / terminals :- Supplied via terminals :-N

Example: 3117

Environmental Conditions

Operating temperature.....	-25°C to +70°C
Storage temperature.....	-40°C to +85°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20
Installation in.....	Pollution degree 2 & meas. / overvoltage cat. II

Mechanical specifications

Dimensions (HxWxD).....	113 x 6.1 x 115 mm
Weight approx.....	70 g
DIN rail type.....	DIN EN 60715/35 mm
Wire size.....	0.13...2.5 mm ² / AWG 26...12 stranded wire
Screw terminal torque.....	0.5 Nm
Vibration.....	IEC 60068-2-6
2...25 Hz.....	±1.6 mm
25...100 Hz.....	±4 g

Common specifications

Supply

Supply voltage.....	16.8...31.2 VDC
Max. required power.....	0.80 W
Max. power dissipation.....	0.43 W

Isolation voltage

Isolation voltage, test / working.....	2.5 kVAC / 300 VAC (reinforced)
Zone 2 / Div. 2.....	250 VAC

Response time

Response time (0...90%, 100...10%).....	< 7 ms or < 44 ms
MTBF, acc. to IEC 61709 (SN29500).....	> 241 years
Signal / noise ratio.....	Min. 60 dB (0...100 kHz)
Signal dynamics, input.....	Analog signal chain
Signal dynamics, output.....	Analog signal chain
Programming.....	DIP switches
Cut-off frequency (3 dB).....	> 100 Hz or 10 Hz (selectable via DIP-switch)
Accuracy.....	< ±0.05% of span
Temperature coefficient.....	< ±0.01% of span / °C
EMC immunity influence.....	< ±0.5% of span
Extended EMC immunity: NAMUR NE21, A criterion, burst.....	< ±1% of span

Input specifications

Current input

Measurement range.....	-23...+23 mA
Programmable measurement ranges.....	± 10 and ± 20 mA
Input voltage drop.....	< 1 VDC @ 23 mA

Voltage input

Measurement range.....	-11.5...+11.5 V
Programmable ranges.....	±5 and ±10 V
Input resistance.....	≥ 1 MΩ

Output specifications

Current output

Signal range.....	0...23 mA
Programmable signal ranges.....	0 / 4...20 mA
Load (@ current output).....	≤ 600 Ω
Load stability.....	≤ 0.002% of span / 100 Ω
Current limit.....	≤ 28 mA

Voltage output

Signal range.....	0...10 VDC
Programmable signal ranges.....	0/1...5 and 0/2...10 V
Load (@ voltage output).....	≥ 10 kΩ
of span.....	= of the presently selected range

I.S. / Ex marking

ATEX.....	II 3 G Ex ec IIC T4 Gc
IECEx.....	Ex ec IIC T4 Gc
FM, US.....	Cl. I, Div. 2, Gp. A, B, C, D T4 or Cl. I, Zone 2, AEx nA IIC T4
FM, CA.....	Cl. I, Div. 2, Gp. A, B, C, D T4 or Cl. I, Zone 2, Ex nA IIC T4

Observed authority requirements

EMC.....	2014/30/EU & UK SI 2016/1091
LVD.....	2014/35/EU & UK SI 2016/1101
ATEX.....	2014/34/EU & UK SI 2016/1107
RoHS.....	2011/65/EU & UK SI 2012/3032
EAC.....	TR-CU 020/2011
EAC Ex.....	TR-CU 012/2011

Approvals

ATEX.....	KEMA 10ATEX0147 X
IECEx.....	KEM 10.0068X
UKEX.....	DEKRA 21UKEX0055X
c FM us.....	FM17US0004X / FM17CA0003X
c UL us, UL 61010-1.....	E314307
CCC.....	2020322310003554
EAC Ex.....	EAEU KZ 7500361.01.01.08756
DNV Marine.....	TAA00001RW