
PERFORMANCE MADE SMARTER

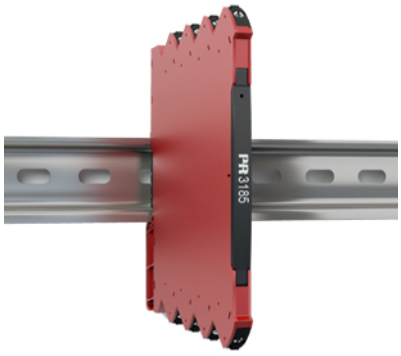

Loop powered isolator

3185


– 1 or 2 channel input loop-powered isolator
– Isolation and 1:1 conversion of standard current signals
– Excellent accuracy and high load stability
– Low input voltage drop and fast response time
– Slimline 6.1 mm housing

Functional highlights
- High 4-port isolation provides surge suppression that protects the control system from transients and noise and eliminates ground loops.
- The device can be mounted in Safe area or in Zone 2 / Division 2 areas and is approved for marine applications.

Technical highlights
- Low input voltage drop, typ. 1.35 V + Vout
- Excellent conversion accuracy, better than 0.1% in the range 0…20.5 mA.
- Fast response time < 5 ms.
- NAMUR NE21, NE43.
- Excellent signal/noise ratio > 60 dB.
- High galvanic isolation of 2.5 kVAC.
- Inputs and outputs are floating and galvanically separated.
- The output is voltage limited to 17.5 VDC.
- Wide ambient temperature range: -25...+70°C.

Mounting / installation
- The narrow 6.1 mm housing allows up to 163 units per meter.
- DIN rail mounting with up to 326 channels per meter.
- Units can be mounted side by side, horizontally and vertically, without air gap on a standard DIN rail, even at 70°C ambient temperature.

Applications

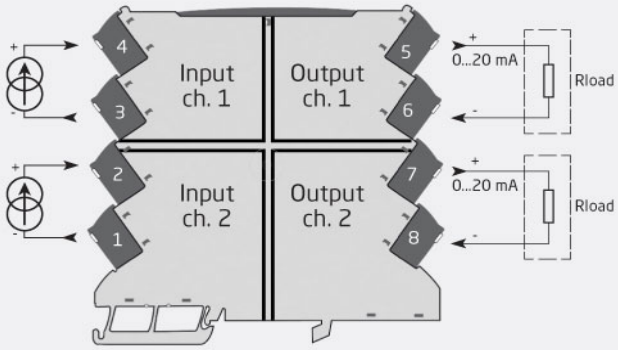

Safe Area or
Zone 2 & Cl. 1, Div. 2, gr. A-D

This page is automatically generated on the basis of information provided on www.prelectronics.com and affiliated websites. It is provided to you as a service and for information purpose only. While we have attempted to maintain the information as accurately as possible, the page may contain errors or omissions for which we disclaim any and all liability

Order

Type	Unit channels	
3185A	Single	: 1
	Double	: 2

Environmental Conditions

Operating temperature	-25°C to +70°C
Storage temperature	-40°C to +85°C
Calibration temperature	20...28°C
Relative humidity	< 95% RH (non-cond.)
Protection degree	IP20
Installation in	Pollution degree 2 & meas. / overvoltage cat. II

Mechanical specifications

Dimensions (HxWxD)	113 x 6.1 x 115 mm
Weight approx	70 g
DIN rail type	DIN EN 60715/35 mm
Wire size	0.13...2.5 mm^2 / AWG 26...12 stranded wire
Screw terminal torque	0.5 Nm
Vibration	IEC 60068-2-6
2...25 Hz	±1.6 mm
25...100 Hz	±4 g

Common specifications

Supply

Power dissipation, per channel	30 mW

Isolation voltage

Isolation voltage, test / working	2.5 kVAC / 300 VAC (reinforced)
Zone 2 / Div. 2	250 VAC

Response time

Response time (0...90%, 100...10%)	< 5 ms
Signal / noise ratio	> 60 dB
Signal dynamics, input	Analog signal chain
Signal dynamics, output	Analog signal chain
Accuracy	Better than 0.1%
Cut-off frequency (3 dB)	100 Hz (1)
EMC immunity influence	< ±0.5% of span
Extended EMC immunity: NAMUR NE21, A criterion, burst	< ±1% of span

Input specifications

Current input

Measurement range	0...23 mA
Input voltage drop	(Unit voltage drop) + Vout.
Signal conversion	1:1
Start-up current, typ	10 uA
Current input overload, max	50 mA
Input to output voltage drop, typ	1.35 V + (0.015 x Vout.)

Output specifications

Current output

Signal range	0...23 mA
Load (@ current output)	≤ 600 Ω
Load stability	< 0.01% of span / 100 Ω
Voltage limit	17.5 V
of span	= 0...20 mA

I.S. / Ex marking

ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc
FM, US	Cl. I, Div. 2, Gp. A, B, C, D T4 or Cl. I, Zone 2, AEx nA IIC T4
FM, CA	Cl. I, Div. 2, Gp. A, B, C, D T4 or Cl. I, Zone 2, Ex nA IIC T4
EAC Ex	2Ex nA IIC T4 Gc X

Observed authority requirements

EMC	2014/30/EU & UK SI 2016/1091
LVD	2014/35/EU & UK SI 2016/1101
ATEX	2014/34/EU & UK SI 2016/1107
RoHS	2011/65/EU & UK SI 2012/3032
EAC	TR-CU 020/2011
EAC Ex	TR-CU 012/2011

Approvals

ATEX	KEMA 10ATEX0147 X
IECEx	KEM 10.0068X
UKEX	DEKRA 21UKEX0055X
c FM us	FM17US0004X / FM17CA0003X
c UL us, UL 61010-1	E314307
CCC	2020322310003554
DNV Marine	TAA00001RW
EAC Ex	EAEU KZ 7500361.01.01.08756