

## Loop-powered isolator

### 6185

- 1-, 2- and 4-channel galvanic isolation
- Slimline channel width of less than 6 mm
- No separate supply necessary
- Low response time
- High noise suppression



#### Application

- Galvanic separation of analog current signals.
- Elimination of ground loops and measurement of floating signals.
- A competitive choice in terms of both price and technology for galvanic isolation of current signals to SCADA systems or PLC equipment.
- Especially useful in applications necessitating an unproblematic transmission of current signals according to NAMUR (sensor error detection).


#### Technical characteristics

- PR 6185 is powered by the measured signal and loads the loop with max. 1.8 VDC.
- The input is protected against overvoltage and polarity error.
- The drop voltage for each channel can be calculated according to the following expression:  $V_{drop} = 1.8 + (I_{out} \cdot R_{load})$ .
- The output is voltage-limited to 15 VDC.
- Inputs and outputs are floating and galvanically separated.

#### Mounting / installation

- Mounted vertically or horizontally on a DIN rail. As the devices can be mounted without distance between neighboring units, up to 168 channels can be mounted per meter.

#### Applications

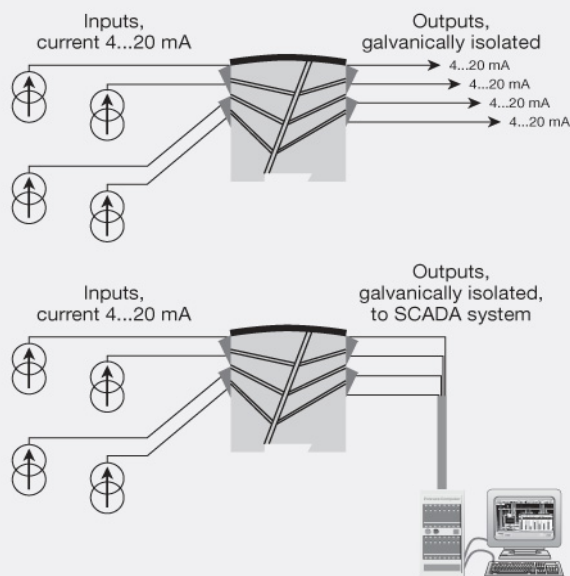

**Order:**

Type	Channels
6185	1 channel : A 2 channels : B 4 channels : D

**Environmental Conditions**

Operating temperature.....	-20°C to +60°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20

**Mechanical specifications**

Dimensions (HxWxD).....	109 x 23.5 x 104 mm
Weight approx.....	155 / 180 / 230 g (1 / 2 / 4 channels)
DIN rail type.....	DIN EN 60715/35 mm
Wire size.....	0.13...2.08 mm <sup>2</sup> AWG 26...14 stranded wire
Screw terminal torque.....	0.5 Nm

**Common specifications****Supply**

Power dissipation, per channel.....	40 mW
-------------------------------------	-------

**Isolation voltage**

Test voltage.....	2 kVAC
-------------------	--------

**Response time**

Response time (0...90%, 100...10%).....	< 4 ms
Voltage drop.....	< 1.8 VDC, min.
Voltage drop.....	1.8 V + (I <sub>out</sub> * R <sub>load</sub> ), max.
Signal / noise ratio.....	Min. 60 dB (0...100 kHz)
Accuracy.....	Better than 0.1% of sel. range
EMC immunity influence.....	< ±0.5% of span

**Input specifications****Current input**

Measurement range.....	0...23 mA
Input resistance.....	≈ 90 Ω + R <sub>load</sub> (@ 20 mA)

**Output specifications****Current output**

Signal range.....	0...23 mA
Min. signal range.....	1:1
Load (@ current output).....	≤ 600 Ω
Load stability.....	< 0.03% of span / 100 Ω
Current limit.....	50 mA
Voltage limit.....	15 VDC
of span.....	= of the presently selected range

**Observed authority requirements**

EMC.....	2014/30/EU & UK SI 2016/1091
RoHS.....	2011/65/EU & UK SI 2012/3032
EAC.....	TR-CU 020/2011