

Pulse isolator / switch amplifier

3202

- Input: NAMUR, NPN open collector, contact
- Output: 2 x relay or NPN transistor output
- 2.5 kVAC 4-port galvanic isolation
- Line Fault Detection (LFD) / cable break detection
- Power supply 16.8 VDC...31.2 VDC



Functional highlights

- Interfaces a NAMUR sensor to typical control system input cards.
- High 4-port isolation provides surge suppression that protects the control system from transients and noise and eliminates ground loops.
- Provides simple splitter function: 1 in – 2 out.
- Monitor signal source for cable short-circuit or cable break with alarm function on secondary output, power rail and LED status.
- The device can be mounted in Safe area or in Zone 2 / Division 2 areas.
- All terminals are over-voltage protected, polarity protected and short-circuit protected.

Technical highlights

- Output options: NPN transistor or mechanical relay.
- Response time: Relay < 20 ms / NPN < 0.1 ms.
- Collective DIN-rail alarm.
- Line Fault Detection (LFD) / cable break detection.
- Wide ambient temperature range -25...70°C.
- NAMUR NE21, NE44.
- Conforms to IEC 60947 standard - switch amplifiers for NAMUR sensors.



Programming

- Easy configuration via DIP-switches.

Mounting

- Units can be mounted side by side, horizontally and vertically, without air gap on a standard DIN rail, even at 70°C ambient temperature.
- Units can be supplied separately or installed on PR 9400 power rail.
- The narrow 6.1 mm housing allows up to 163 units per meter.

Applications

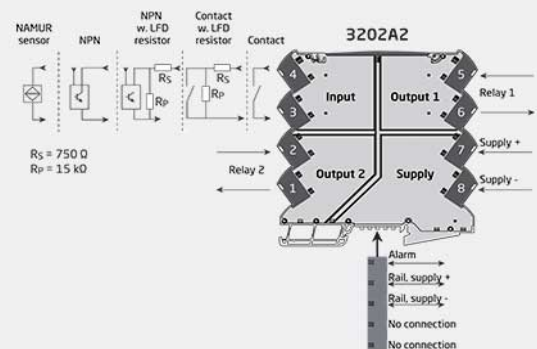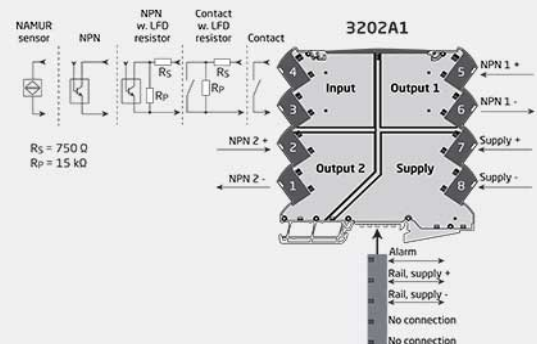

Order

| Type | Version | | |
|------|---|------|---|
| 3202 | Pulse isolator / switch amplifier, NPN output | : A1 | With power rail connector / terminals : - |
| | Pulse isolator / switch amplifier, relay output | : A2 | Supplied via terminals : -N |

Example: 3202A1-N (Pulse isolator / switch amplifier, NPN output, supplied via terminals)

Environmental Conditions

| | |
|------------------------------|--|
| Operating temperature..... | -25°C to +70°C |
| Storage temperature..... | -40°C to +85°C |
| Calibration temperature..... | 20...28°C |
| Relative humidity..... | < 95% RH (non-cond.) |
| Protection degree..... | IP20 |
| Installation in..... | Pollution degree 2 & meas. / overvoltage cat. II |

Mechanical specifications

| | |
|----------------------------|--|
| Dimensions (HxWxD)..... | 113 x 6.1 x 115 mm |
| Weight approx..... | 70 g (3202A1) / 80 g (3202A2) |
| DIN rail type..... | DIN EN 60715/35 mm |
| Wire size..... | 0.13...2.5 mm ² / AWG 26...12 stranded wire |
| Screw terminal torque..... | 0.5 Nm |

Common specifications

Supply

| | |
|-----------------------------|-----------------------------------|
| Supply voltage..... | 16.8...31.2 VDC |
| Max. power dissipation..... | 0.65 W (3202A1) / 0.95 W (3202A2) |
| Max. required power..... | ≤ 1.2 W |

Isolation voltage

| | |
|--|---------------------------------|
| Isolation voltage, test / working..... | 2.5 kVAC / 300 VAC (reinforced) |
|--|---------------------------------|

Auxiliary supplies

| | |
|-------------------------------|------------------------------|
| Sensor supply limitation..... | 8.2 VDC, max. 8.2 mA @ 0 VDC |
|-------------------------------|------------------------------|

Input specifications

NAMUR input

| | |
|-------------------------|--------------|
| NAMUR according to..... | EN 60947-5-6 |
| Trig level LOW..... | < 1.2 mA |
| Trig level HIGH..... | > 2.1 mA |
| Sensor supply..... | 8.2 VDC |

NPN and mechanical switch

| | |
|---------------------------|----------|
| Max. input frequency..... | 5 kHz |
| Trig level LOW..... | < 1.2 mA |
| Trig level HIGH..... | > 2.1 mA |
| Max. input voltage..... | 24 VDC |

Output specifications

Relay output

| | |
|---|------------------------|
| Max. voltage..... | 250 VAC / 200 VDC |
| Max. current..... | 2 AAC |
| Max. AC power..... | 100 VA |
| Max. DC current, resistive load ≤ 30 VDC..... | 2 ADC |
| Max. DC current, resistive load > 30 VDC..... | See manual for details |
| Max. switching frequency..... | 20 Hz |
| Response time..... | < 20 ms |

NPN output

| | |
|---------------------------------|----------|
| Max. voltage..... | 30 VDC |
| Max. switching frequency..... | 5 kHz |
| Min. pulse length..... | > 0.1 ms |
| Max. voltage drop at 80 mA..... | 2.5 VDC |
| Response time..... | < 0.1 ms |

Observed authority requirements

| | |
|-----------|------------------------------|
| EMC..... | 2014/30/EU & UK SI 2016/1091 |
| LVD..... | 2014/35/EU & UK SI 2016/1101 |
| ATEX..... | 2014/34/EU & UK SI 2016/1107 |
| RoHS..... | 2011/65/EU & UK SI 2012/3032 |

Approvals

| | |
|--------------------------|---------------------------|
| ATEX..... | KEMA 10ATEX0147 X |
| IECEX..... | KEM 10.0068X |
| UKEX..... | DEKRA 21UKEX0055X |
| c FM us..... | FM17US0004X / FM17CA0003X |
| c UL us, UL 61010-1..... | E314307 |
| CCC..... | 2020322310003554 |