



Temperature Transmitters

The 5300 & 6300 series

ADDING VALUE TO FACTORY
AND PROCESS AUTOMATION



display



I. S. barrier



isolation



temperature



universal



Freedom the rational way

A serious partner for the process industry

For the past 30 years we have specialized in transmitters for temperature measurement and our focus has always been on meeting the demands of the industry. Our product range is uncompromising when it comes to reliability and quality. Due to the small number of product variants it always provides you with an optimum solution reducing inventory costs both for OEM sensor customers and end-user customers as well. You will experience both concrete and cost-saving advantages as we offer you:

- A five-year guarantee for long-term stable and reliable temperature measurement allowing you to optimize your process to the highest possible level of efficiency and productivity.
- An active partner offering day-to-day delivery as well as advice and service at a high level - always meeting your demands.

Technological leader in temperature transmitters

With the implementation of our new AUTOSWITCH principle, we have taken the market lead in transmitter technology. AUTOSWITCH is a unique principle recognizing both PROFIBUS® PA and FOUNDATION™ Fieldbus protocols via the telegram format and automatically switching to the applied protocol. Using this technology the same type of transmitter can communicate with the two most common bus protocols – and our customers can achieve greater flexibility and reduce educational, purchasing and inventory expenses through product standardization.



Digital output

Universal

5350/6350

Universal transmitter for 2-, 3- and 4-wire sensors with PROFIBUS® PA or FOUNDATION™ Fieldbus

5335/6335

Universal 4...20 mA transmitter for 2-, 3- and 4-wire sensors with HART® communication

5331/6331

Universal 4...20 mA transmitter for 2-, 3- and 4-wire sensors

5334/6334

4...20 mA transmitter for thermocouple sensors

5333/6333

4...20 mA transmitter for 3-wire Pt100 and RTD sensors

Analog output

Application-specific

**5350****6335**

Number **1** in Operational Reliability

It is our objective to deliver the most reliable temperature transmitters on the market, even when it comes to hazardous locations and the most difficult applications. Why so? Because operational reliability can be directly converted into cost-savings. How much does an hour's down time in your process cost? And not least, how much annoyance does it cause?

Operational reliability is achieved by efficiently protecting the transmitter against outside disturbances. Therefore all temperature transmitters from PR electronics have been developed with a view to achieving a high basic accuracy, maximum protection against electromagnetic noise, and an extremely low temperature coefficient. This reliability is reflected in concrete product advantages satisfying our customers' demands for quality and stability and always backed up by our five-year guarantee.

Unique product features that minimizes operational stops and increases productivity:



High immunity to conducted noise: This type of disturbance may come from frequency converters or switchmode power supplies. Our transmitters are tested against 10 Vrms in the range 15 Hz–100 MHz according to requirements from the marine industry among others.



High immunity to HF noise: Airborne disturbances from cell phones, walkie-talkies etc. All our transmitters are tested at 10 V/m in the entire prescribed range (80-1000 MHz) and thus meet the NAMUR NE 21 A criterion.




High immunity to energy-loaded transients: The disturbance comes from e.g. contactors. Our transmitters are surge-tested at a test voltage of 1 kV differential mode and 2 kV common mode according to NAMUR NE 21 A criterion.




High immunity to burst noise: Efficient protection against burst noise from e.g. relays. In order to ensure a reliable operation in areas exposed to a high degree of burst noise, we test our transmitters at 2.5 kV for twelve hours. We easily meet the NAMUR NE 21 A criterion prescribing 2.0 kV for 1 minute.



Extremely low temperature coefficient: State-of-the-art when it comes to a high basic accuracy and an extremely low temperature coefficient of down to 0.002% - measured according to the European standard IEC 68-2-1 / IEC 68-2-2 / IEC 770 6.2.10.

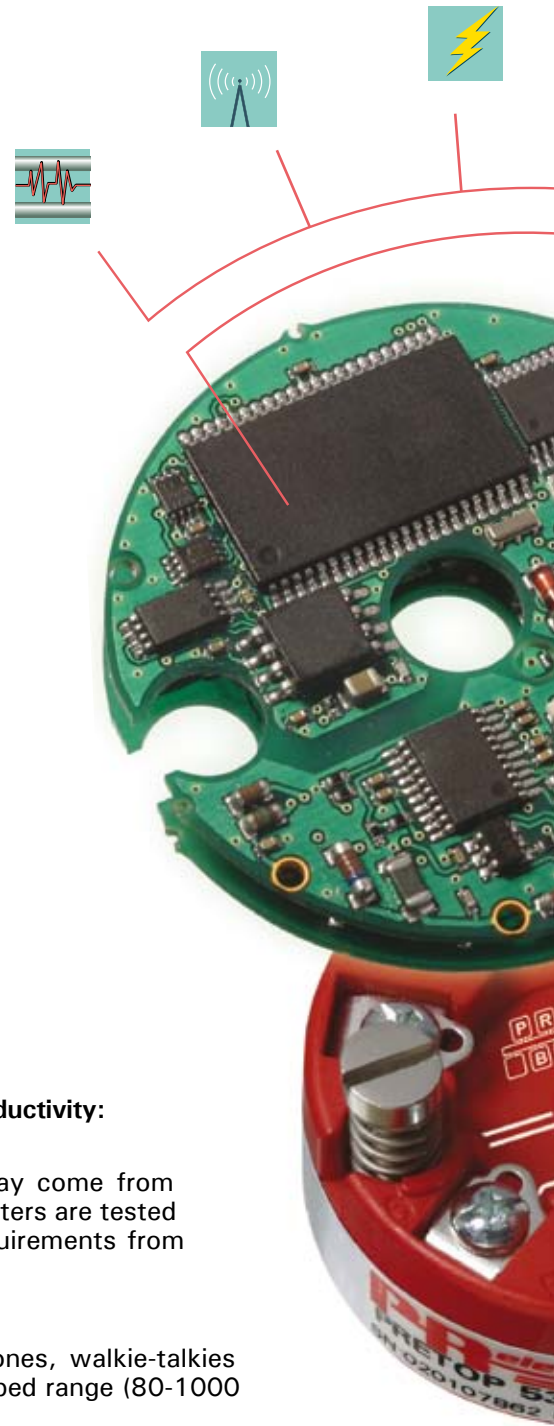

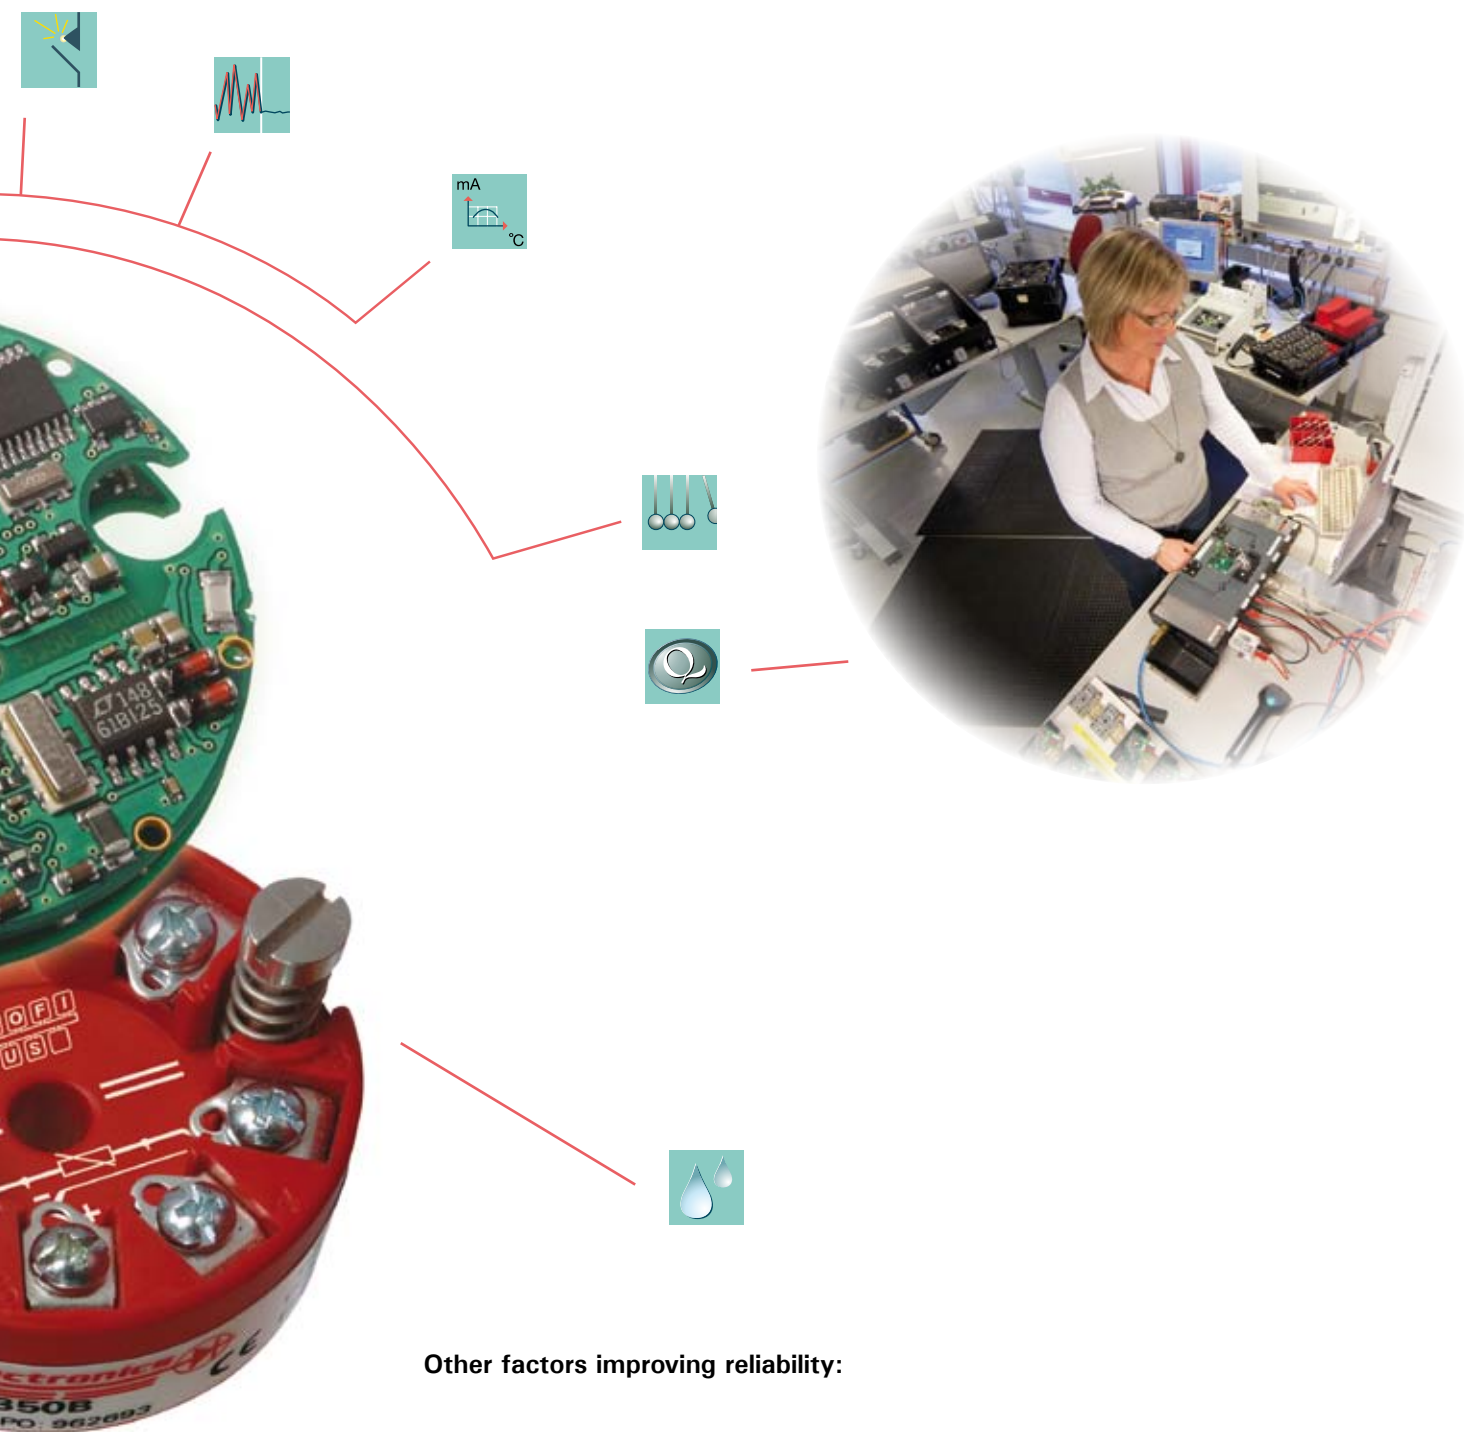

Other factors improving reliability:



High signal / noise ratio of typically 80-100 dB corresponding to a noise attenuation factor of 10,000 – 100,000.



Long-term stability: Microprocessor technology ensures a maximum long-term stability of less than 0.15% / 0.20% after 5 years. Even after prolonged working periods there is no need for time-consuming recalibration.



Degree of protection NEMA 6P: Your guarantee that the transmitter is able to function in even the most humid of environments.




Calibration in a controlled environment: 100% control and calibration to absolute values in an environment where all ambient factors and possible disturbances are efficiently monitored and controlled.



Universal and Accessible Transmitter Set-up

Process calibration ensures extreme accuracy


In applications making heavy demands on accuracy, the combined inaccuracy of sensor and transmitter may be too great. The solution is to calibrate the transmitter to match the specific sensor. As an example the Pt100 ideal curve of the transmitter is matched to the specific sensor via a 2-point process calibration by way of the PReset software.

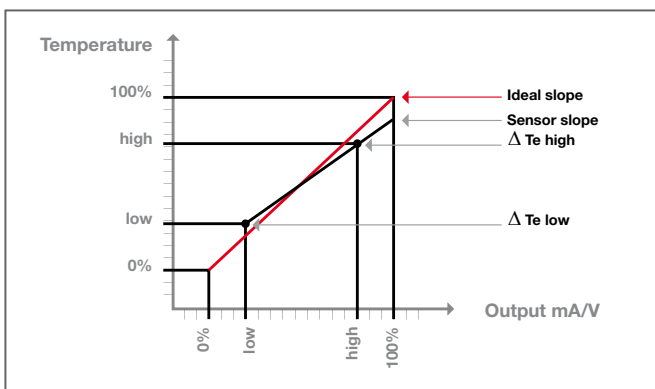

Set-up of sensor error detection

All our transmitters allow set-up of sensor error detection and output limitation, making it possible to distinguish between "out of range" error and sensor error.

Sensor error detection can be carried out according to NAMUR NE 43 or it can be adapted to suit a specific application.

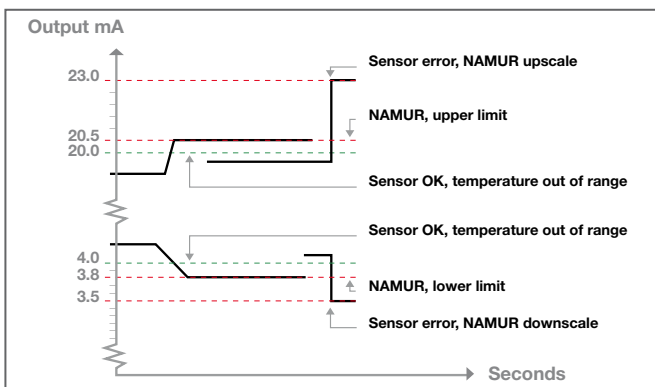

Quick on-line configuration via PC software

Temperature transmitters from PR electronics are quickly configured to the specific application. All our analog transmitters and HART® transmitters permit configuration via a standard PC and our user-friendly software, PReset. Parameters for input, output, sensor error detection and process calibration can be configured via PReset within a few minutes.

Some applications call for an occasional change in the transmitter set-up in order to configure it to the actual process. In this respect, the PRetop transmitter series is absolutely unique as these transmitters all feature on-line configuration, carried out through the transmitter's current loop.

Our bus transmitters are also universal regarding configuration as they are able to communicate with all the most recognized bus software systems on the market:

- Emerson DeltaV
- Yokogawa CS 1000 / CS 3000
- ABB Melody / Harmony
- Siemens Simatic® PDM®
- Honeywell Experion
- Metso DNA

Intelligent, digital solutions




Our transmitter solutions are suitable for systems using HART®, PACTware, FOUNDATION™ Fieldbus or PROFIBUS® PA protocols for digital communication. The digital communication opens a wide range of possibilities, e.g.:

- Difference, average or redundancy measurements
- PID control with FOUNDATION™ Fieldbus
- LAS or Basic functionality with FOUNDATION™ Fieldbus
- Diagnosing via fully-supported AMS function in HART® transmitters



PRetop Product Range

SIL2




	5331	5333	5334	5335	5350
RTD/R transmitter	✓	✓		✓	✓
TC/mV transmitter	✓		✓	✓	✓
Galvanic isolation	1500 VAC		1500 VAC	1500 VAC	1500 VAC
Channels	1	1	1	1	1
Basic accuracy Pt100	<± 0.2°C	<± 0.3°C		<± 0.1°C	<± 0.1°C
Temperature coefficient *)	<± 0.01%	<± 0.01%	<± 0.01%	<± 0.005%	<± 0.002%
NAMUR NE 21 A	✓		✓	✓	✓
DIN form B housing	✓	✓	✓	✓	✓
Analog output	✓	✓	✓	✓	
Digital output				  	
PRreset programming	✓	✓	✓	✓	
Bus programming					✓

*) % of span/°C



PRetrans Product Range

SIL2

	6331	6333	6334	6335	6350
RTD/R transmitter	✓	✓		✓	✓
TC/mV transmitter	✓		✓	✓	✓
Galvanic isolation	1500 VAC		1500 VAC	1500 VAC	1500 VAC
Channels	1&2	1&2	1&2	1&2	1&2
Basic accuracy Pt100	<± 0.2°C	<± 0.3°C		<± 0.1°C	<± 0.1°C
Temperature coefficient *)	<± 0.01%	<± 0.01%	<± 0.01%	<± 0.005%	<± 0.002%
NAMUR NE 21 A	✓		✓	✓	✓
DIN rail mounting	✓	✓	✓	✓	✓
Analog output	✓	✓	✓	✓	
Digital output				  	
mA to bus communication				✓	✓
PRreset programming	✓	✓	✓		
Bus programming				✓	

*) % of span/°C



Signals the Best

Around the world, PR electronics helps create increased efficiency and safety via industrial signal conditioning. The means to achieve this is reliable, flexible and user-friendly devices, thorough technical documentation, fast delivery and competent technical support – in short, all aspects which are of importance to our customers.



USA

PR electronics Inc
11225 West Bernardo Court
Suite A
San Diego, California 92127

www.preelectronics.com
sales@preelectronics.com
tel. +1 858 521 0167
Fax +1 858 521 0945

Head office

Denmark
PR electronics A/S
Lerbakken 10
DK-8410 Rønde

www.preelectronics.com
sales@preelectronics.dk
tel. +45 86 37 26 77
fax +45 86 37 30 85