

## Isolated repeater

### 3103

- Isolation and 1:1 conversion of standard current signals
- Slimline housing of 6 mm
- Response time < 7 ms
- Low cost
- Simple - no setup needed




#### Application

- Isolation and 1:1 conversion of standard current signals.
- Galvanic separation of analog current signals.
- Elimination of ground loops and measurement of floating signals.
- A competitive choice in terms of both price and technology for galvanic isolation of current signals to SCADA systems or PLC equipment.
- Installation in ATEX Ex zone 2 / IECEx Zone 2 / FM division 2.
- Suitable for environments with high vibration stress, e.g. ships.

#### Technical characteristics

- The input is protected against overvoltage and polarity error.
- Factory-calibrated measurement ranges.
- Inputs and outputs are floating and galvanically separated.

#### Applications

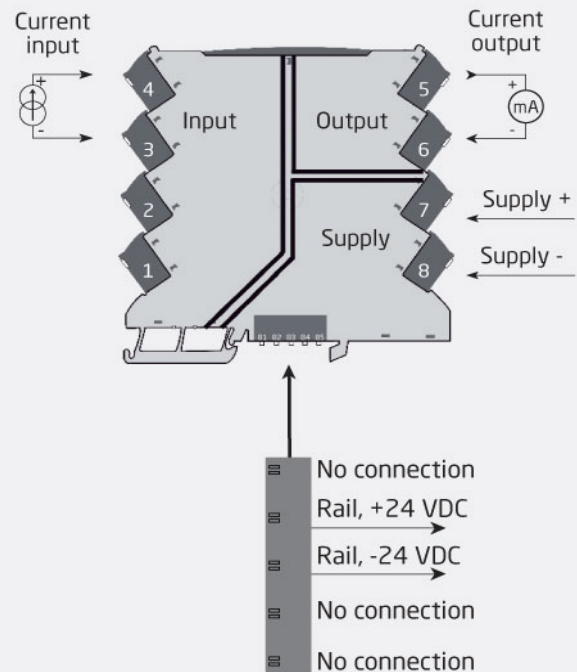

**Safe Area or  
Zone 2 & Cl. 1, Div. 2, gr. A-D**

## Order

Type	Version
3103	With power rail connector / terminals :- Supplied via terminals :-N

Example: 3103-N

## Environmental Conditions

Operating temperature.....	-25°C to +70°C
Storage temperature.....	-40°C to +85°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20
Installation in.....	Pollution degree 2 & meas. / overvoltage cat. II

## Mechanical specifications

Dimensions (HxWxD).....	113 x 6.1 x 115 mm
Weight approx.....	70 g
DIN rail type.....	DIN EN 60715/35 mm
Wire size.....	0.13 x 2.5 mm <sup>2</sup> / AWG 26...12 stranded wire
Screw terminal torque.....	0.5 Nm
Vibration.....	IEC 60068-2-6
2...25 Hz.....	±1.6 mm
25...100 Hz.....	±4 g

## Common specifications

### Supply

Supply voltage.....	16.8...31.2 VDC
Max. required power.....	0.65 W
Max. power dissipation.....	0.60 W

### Isolation voltage

Isolation voltage, test / working.....	2.5 kVAC / 300 VAC (reinforced)
Zone 2 / Div. 2.....	250 VAC

### Response time

Response time (0...90%, 100...10%)..... < 7 ms

Signal / noise ratio.....	> 60 dB
Cut-off frequency (3 dB).....	> 100 Hz
Signal dynamics, input.....	Analog signal chain
Signal dynamics, output.....	Analog signal chain
Accuracy.....	Better than 0.05%
Temperature coefficient.....	< ±0.01% of span / °C
EMC immunity influence.....	< ±0.5% of span
Extended EMC immunity: NAMUR NE21, A criterion, burst.....	< ±1% of span

## Input specifications

### Current input

Measurement range.....	0...23 mA
Input voltage drop.....	< 1.5 VDC

## Output specifications

### Current output

Signal range.....	0...23 mA
Load (@ current output).....	≤ 600 Ω
Load stability.....	≤ 0.002% of span / 100 Ω
Current limit.....	≤ 28 mA
of span.....	= 0...20 mA

## I.S. / Ex marking

ATEX.....	II 3 G Ex nA IIC T4 Gc
IECEX.....	Ex nA IIC T4 Gc
FM, US.....	Cl. I, Div. 2, Gp. A, B, C, D T4 or Cl. I, Zone 2, AEx nA IIC T4
FM, CA.....	Cl. I, Div. 2, Gp. A, B, C, D T4 or Cl. I, Zone 2, Ex nA IIC T4

## Observed authority requirements

EMC.....	2014/30/EU
LVD.....	2014/35/EU
RoHS.....	2011/65/EU
EAC.....	TR-CU 020/2011

## Approvals

ATEX 2014/34/EU.....	KEMA 10ATEX0147 X
IECEX.....	KEM 10.0068X
FM.....	FM17US0004X / FM17CA0003X
UL.....	UL 61010-1
DNV-GL Marine.....	Stand. f. Certific. No. 2.4
EAC Ex TR-CU 012/2011.....	RU C-DK.GB08.V.00410
CCOE.....	P337347/1